

MSR Gold™ MiniFastFit (Touring/Stage)

MSR Gold™ 1000 MiniFastFit 1CT/4

Thanks to the specially designed lamp base, the MSR Gold™ MiniFastFit takes just seconds to replace, to help ensure non-stop clubbing entertainment. In addition, the innovative gold plated pins ensure excellent current transfer to prolong lamp and lamp holder lifetimes and thereby reduce lamp replacement costs. Easy handling and small compact fixture designs are allowed by the lamps compact size, while the very short arc provides a high perceived brightness and high beam intensity.

Product data

• General Information

Cap-Base	PGJX36 [PGJX36]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Entertainment
Life To 50% Failures (Nom)	900 h
System Description	MiniFastFit

• Light Technical

Color Code	- [Not Specified]
Luminous Flux (Min)	74000 lm
Luminous Flux (Nom)	82000 lm
Chromaticity Coordinate X (Nom)	0.321
Chromaticity Coordinate Y (Nom)	0.330
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (rated) (Nom)	82 lm/W
Color Rendering Index (Nom)	80

• Operating and Electrical

Power (Rated) (Nom)	1000.0 W
Lamp Current (Nom)	11.4 A
Ignition Supply Voltage (Min)	198 V

• Controls and Dimming

Dimmable	No

• Mechanical and Housing

Cap-Base Information	PGJX36

• Luminaire Design Requirements

Bulb Temperature (Max)	950 °C
Pinch Temperature (Max)	500 °C

• Product Data

Full product code	871829178508800
Order product name	MSR Gold™ 1000 MiniFastFit 1CT/4
EAN/UPC - Product	8718291785088
Order code	928171405115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928171405115
Net Weight (Piece)	0.055 kg


PHILIPS

MSR Gold™ MiniFastFit (Touring/Stage)

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

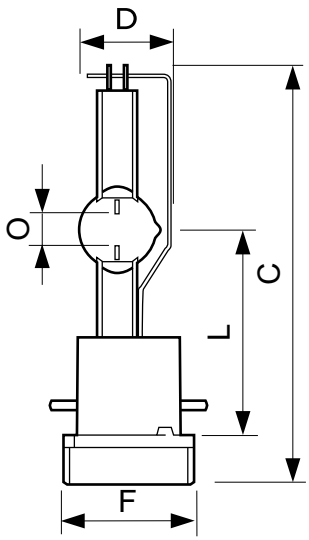

MSR Gold™ 1000 MiniFastFit

MSR GOLD 1000 MiniFastFit

Product	D	O	L	L	L	C	F	F	F
MSR Gold™ 1000 MiniFastFit 1CT/4	26 mm	5.5 mm	55 mm	57 mm	56 mm	112 mm	36.5 mm	36 mm	35.3 mm



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 13
data subject to change