MSD Platinum (Touring/ Stage)



MSD Platinum 5 R 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

Product data

• General Information

Cap-Base	-
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Stage/Touring
Life To 50% Failures (Nom)	3000 h
System Description	Reflector-E20.6

• Light Technical

Color Code	2
Luminous Flux (Min)	7100 lm
Luminous Flux (Nom)	7950 lm
Chromaticity Coordinate X (Nom)	300
Chromaticity Coordinate Y (Nom)	300
Correlated Color Temperature (Nom)	8000 K
Color Rendering Index (Nom)	-

• Operating and Electrical

Power (Rated) (Nom)	189 W

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Cap-Base Information	-

• Luminaire Design Requirements

Pinch Temperature (Max)	350 °C

• Product Data

Full product code	872790093070200
Order product name	MSD Platinum 5 R 1CT/8
EAN/UPC - Product	8727900930702
Order code	928190805314
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	928190805314
Net Weight (Piece)	0.120 kg


Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

PHILIPS

MSD Platinum (Touring/Stage)

Dimensional drawing

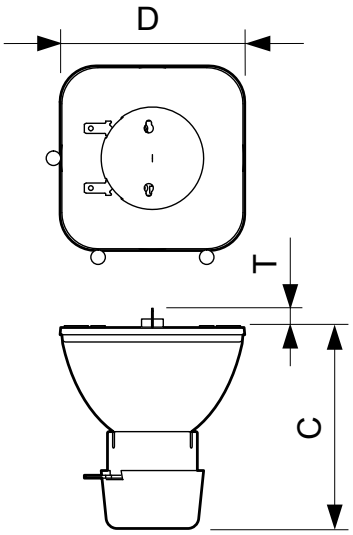



MSD Platinum 5 R and 14 R

MSD Platinum 5 R

Product	D	T	O	C
MSD Platinum 5 R 1CT/8	51.4 mm	6.8 mm	1.0 mm	57.1 mm

Photometric data

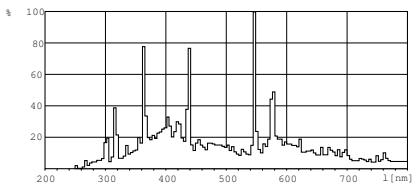

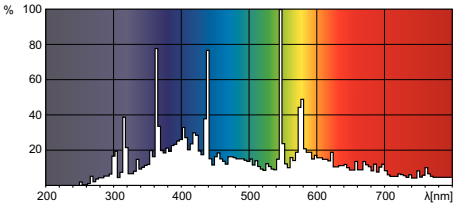

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 24
data subject to change