PHILIPS

Lighting



CorePro LEDbulbs

CorePro LEDbulb 9.5-60W 840 E27

CorePro LEDbulbs are compatible with existing fixtures with an E27 or B22 holder and are designed for retrofit replacement of incandescent bulbs. They deliver huge energy savings and minimize maintenance cost. The CorePro LED bulb is the perfect bulb for your basic lighting needs. It provides the beautiful light and dependable performance you expect from LED at an affordable price.

Product data

General Information	
Cap-Base	E27 [E27]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	9.5-60W

Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	200 °
Luminous Flux (Nom)	806 lm
Luminous Flux (Rated) (Nom)	806 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (Rated) (Nom)	84.84 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	9.5 W
Lamp Current (Nom)	80 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	instant full light
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V

Temperature	
T-Case Maximum (Nom)	85 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Frosted

Approval and Application	
Suitable For Accent Lighting	No
Energy Efficiency Label (EEL)	A+
Energy Consumption kWh/1000 h	10 kWh


Product Data	
Full product code	871869651034600

CorePro LEDbulbs

Order product name	CorePro LEDbulb 9.5-60W 840 E27
EAN/UPC - Product	8718696510346
Order code	929001179602
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

Material Nr. (12NC)	929001179602
Net Weight (Piece)	0.076 kg


Dimensional drawing




Product	D	C
CorePro LEDbulb 9.5-60W 840 E27	60 mm	110 mm

LED 9.5-60W E27 840

Photometric data



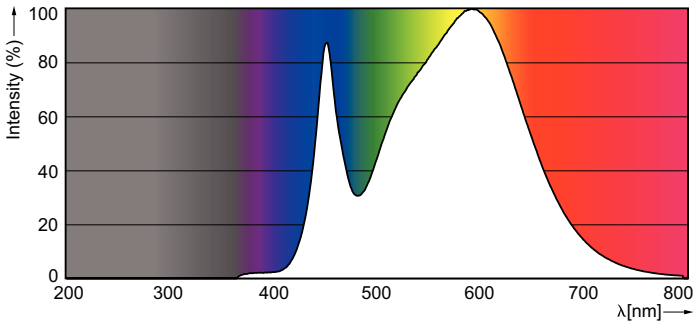

40W, 60W A60

A60 /840 FR

© 2017 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.