PHILIPS

Lighting



MASTER VALUE LEDspot LV

MAS LEDspotLV VLE 3.4-20W 827 MR16 36D

Philips MASTER VALUE MR16 is the series of Low Voltage (12VAC) Halogen MR16 replacements. Not only does it employs Philips' patented solution to guarantee the broadest possible compatibility with standard 12V Halogen electronic transformers. It also delivers beam intensity which is equivalent to the 50W Philips Halogen MR16 lamps. The form-factor of Philips MASTER Value LED MR16 guarantees a 100% form on the back-side of the lamp (exact form with Halogen lamps.)

Product data

General Information	
Cap-Base	GU5.3 [GU5.3]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	3.4-20W

Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	36 °
Light Distribution	Medium beam 36°
Luminous Flux (Nom)	240 lm
Luminous Flux (Rated) (Nom)	240 lm
Luminous Intensity (Nom)	550 cd
Color Designation	Warm White (WW)
Rated Beam Angle	36 °
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (Rated) (Nom)	65.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	220 lm

Operating and Electrical	
Power (Rated) (Nom)	3.4 W
Lamp Current (Nom)	520 mA
Wattage Equivalent	20 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	instant full light
Power Factor (Nom)	0.7
Voltage (Nom)	12 V

Temperature	
T-Case Maximum (Nom)	65 °C

Controls and Dimming	
Dimmable	No

MASTER VALUE LEDspot LV

Approval and Application	
Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	A+
Energy Consumption kWh/1000 h	4 kWh


Product Data	
Full product code	871869647572000
Order product name	MAS LEDspotLV VLE 3.4-20W 827 MR16 36D

EAN/UPC - Product	8718696475720
Order code	929001147502
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001147502
Net Weight (Piece)	0.035 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


Dimensional drawing




LED VLE 3.4-20W GU5.3 827 MR16 36D

Product	D	C
MAS LEDspotLV VLE 3.4-20W 827 MR16 36D	50 mm	49 mm

Photometric data



VLE 3.4-20W GU5.3 827 MR16 36D

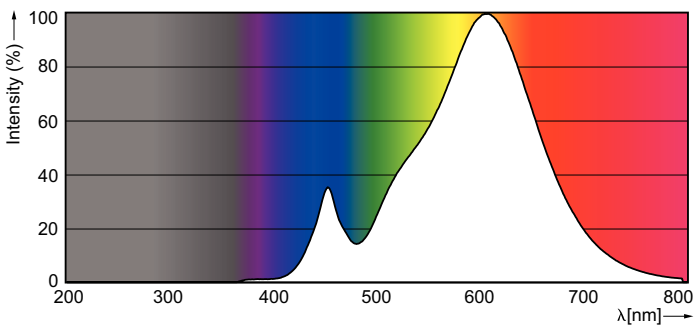

VLE 3.4-20W GU5.3 827 MR16



© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.

www.lighting.philips.com
2018, March 16 - data subject to change