

Actinic BL TL-D(K) Secura

Actinic BL TL-D TL-D 15W/10 Secura 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Main Application	Reprography (R)
Life to 50% Failures (Nom)	8000 h
Useful Life (Nom)	5000 h

Light Technical	
Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	222
Chromaticity Coordinate Y (Nom)	210
UV Depreciation at 2000 h	25 %
UV Depreciation at 5000 h	40 %

Operating and Electrical	
Power (Rated) (Nom)	15 W
Lamp Current (Nom)	0.335 A
Voltage (Nom)	51 V

Approval and Application	
Mercury (Hg) Content (Nom)	5.5 mg

UV	
UV-B/UV-A (IEC)	0.2 %
UV-A Radiation 100Hr (IEC)	3.15 W

Product Data	
Full product code	871150089858640
Order product name	Actinic BL TL-D TL-D 15W/10 Secura 1SL/25
EAN/UPC - Product	8711500898586
Order code	928024701029
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928024701029


Actinic BL TL-D(K) Secura

Net Weight (Piece)	61.000 g

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D TL-D 15W/10 Secura 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

TL-D 15W/10 SECU

Photometric data

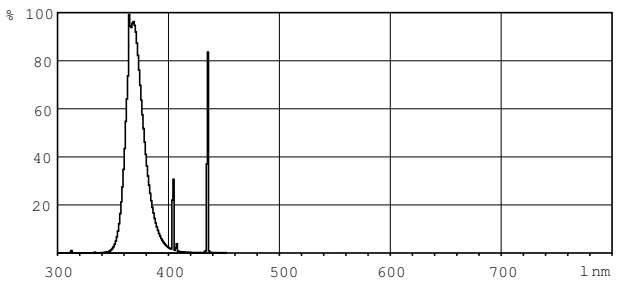

Lightcolor /10

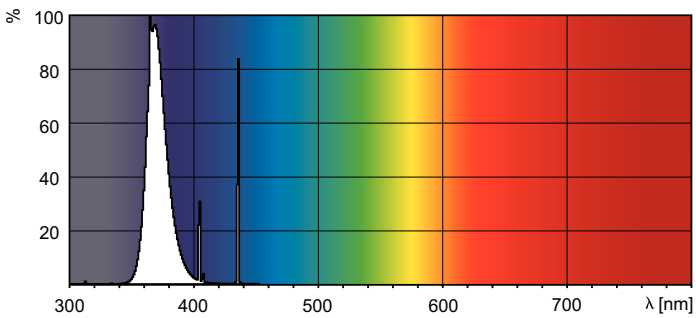

Lightcolor /10

© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.