

MASTER VALUE LEDspot LV

MAS LEDspotLV VLE D6.3-35W 840MR16 24DRS

Philips MASTER VALUE MR16 is the series of Low Voltage (12VAC) Halogen MR16 replacements. Not only does it employs Philips' patented solution to guarantee the broadest possible compatibility with standard 12V Halogen electronic transformers. It also delivers beam intensity which is equivalent to the 50W Philips Halogen MR16 lamps. The form-factor of Philips MASTER Value LED MR16 guarantees a 100% form on the back-side of the lamp (exact form with Halogen lamps.)

Product data

General Information	
Cap-Base	GU5.3 [GU5.3]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	6.3-35W

Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	24 °
Light Distribution	Medium beam 24°
Luminous Flux (Nom)	410 lm
Luminous Flux (Rated) (Nom)	410 lm
Luminous Intensity (Nom)	1800 cd
Color Designation	Cool White (CW)
Rated Beam Angle	24 °
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (Rated) (Nom)	65.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	410 lm

Operating and Electrical	
Power (Rated) (Nom)	6.3 W
Lamp Current (Nom)	800 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	instant full light
Power Factor (Nom)	0.7
Voltage (Nom)	12 V

Temperature	
T-Case Maximum (Nom)	100 °C

Controls and Dimming	
Dimmable	Yes

MASTER VALUE LEDspot LV

Approval and Application	
Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	A
Energy Consumption kWh/1000 h	7 kWh


Product Data	
Full product code	871869644221000
Order product name	MAS LEDspotLV VLE D6.3-35W 840MR16 24DRS

EAN/UPC - Product	8718696442210
Order code	929001151962
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001151962
Net Weight (Piece)	0.045 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


Dimensional drawing




LED VLE D 6.3-35W 840 MR16 24D

Product	D	C
MAS LEDspotLV VLE D6.3-35W 840MR16 24DRS	50.5 mm	50.5 mm

Photometric data



6.3-35 W GU5.3 /840 MR16 24D

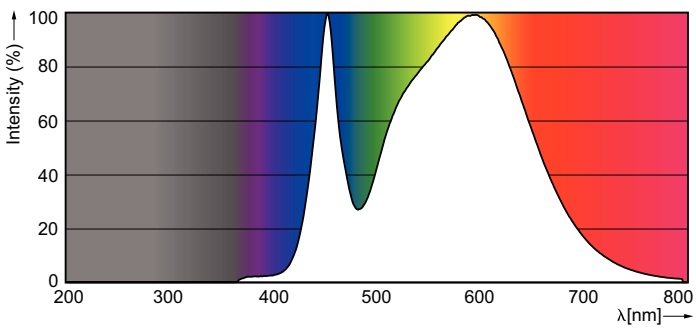

VLE D 6.3-35 W GU5.3 /840 MR16



© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.

www.lighting.philips.com
2018, February 8 - data subject to change