

MASTER PL-S 4 Pin

MASTER PL-S 5W/827/4P 1CT/5X10BOX

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Product data

General Information	
Cap-Base	2G7 [2G7]
Life to 50% Failures Preheat (Nom)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	97 %
LSF Preheat 8000 h Rated	92 %
LSF Preheat 16000 h Rated	30 %

Light Technical	
Color Code	827 [CCT of 2700K]
Luminous Flux (Nom)	250 lm
Luminous Flux (Rated) (Nom)	259 lm
Color Designation	Incandescent White
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (Rated) (Nom)	52 lm/W
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	95 %
LLMF 4000 h Rated	92 %
LLMF 6000 h Rated	90 %
LLMF 8000 h Rated	88 %
LLMF 12000 h Rated	86 %

Operating and Electrical	
Power (Rated) (Nom)	5.4 W
Lamp Current (Nom)	0.180 A

Temperature	
Design Temperature (Nom)	28 °C

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Cap-Base Information	4 Pins

Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	6 kWh

Product Data	
Full product code	871150026051270

MASTER PL-S 4 Pin


Order product name	MASTER PL-S 5W/827/4P 1CT/5X10BOX
EAN/UPC - Product	8711500260512
Order code	927935482711
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50

Material Nr. (12NC)	927935482711
Net Weight (Piece)	20.000 g
ILCOS Code	FSD-5/27/1B-E-2G7

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




PL-S 5W/827/4P LM

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-S 5W/827/4P 1CT/ 5X10BOX	28 mm	13 mm	66 mm	83 mm	89.1 mm

Photometric data

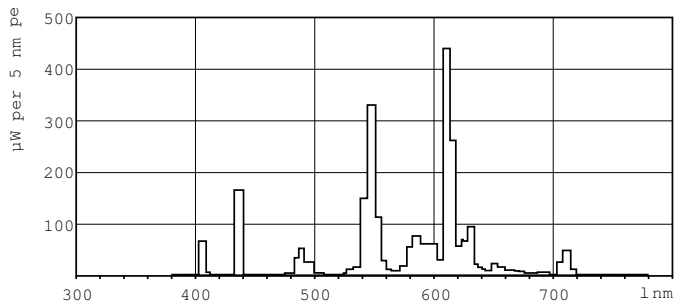


Lightcolor /827

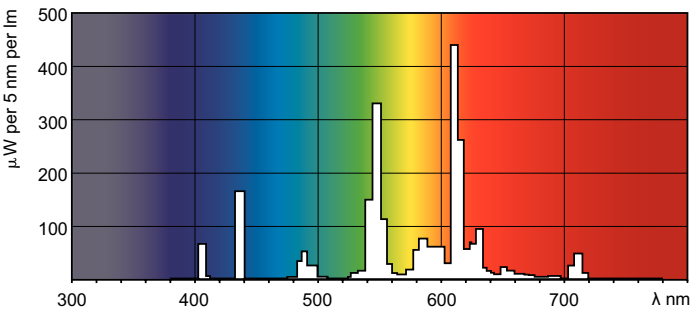


Lightcolor /827

MASTER PL-S 4 Pin


Lifetime

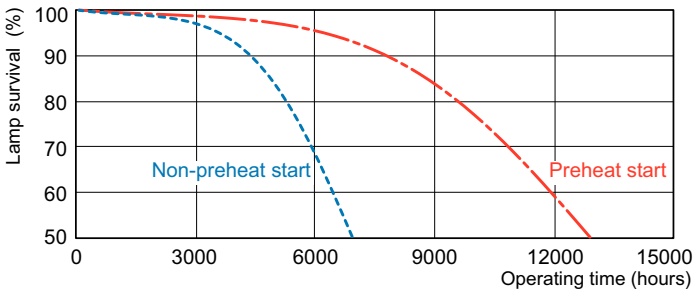

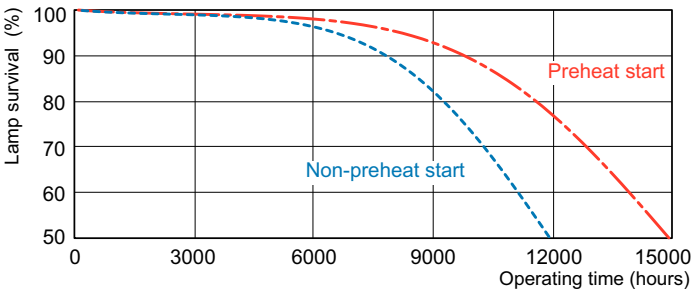

Life Expectancy 3 h cycle

Life Expectancy 12 h cycle

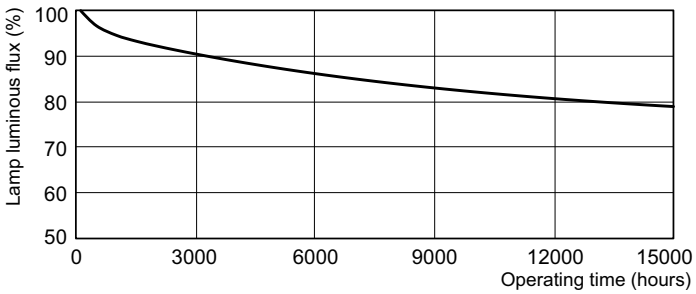

Lumen Maintenance 3 h + 12 h cycle

© 2017 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.