PHILIPS

Lighting



MASTER TL-D Super 80

MASTER TL-D Super 80 58W/840 UNP/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life to 10% Failures (Nom)	12000 h
Life to 50% Failures (Nom)	15000 h
Life to 50% Failures Preheat (Nom)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2 %

Light Technical	
Color Code	840 [CCT of 4000K]
Luminous Flux (Nom)	5240 lm
Luminous Flux (Rated) (Nom)	5240 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (Rated) (Nom)	90 lm/W
Color Rendering Index (Nom)	>80
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical	
Power (Rated) (Nom)	58.5 W
Lamp Current (Nom)	0.670 A

Temperature	
Design Temperature (Nom)	25 °C

Controls and Dimming	
Dimmable	Yes

Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	68 kWh

Product Data	
Full product code	871150061029440
Order product name	MASTER TL-D Super 80 58W/840 UNP/25
EAN/UPC - Product	8711500610294

MASTER TL-D Super 80


Order code	927922084069
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927922084069

Net Weight (Piece)	167.000 g
ILCOS Code	FD-58/40/1B-E-G13

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 58W/840 UNP/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm

TL-D 58W/840

Photometric data

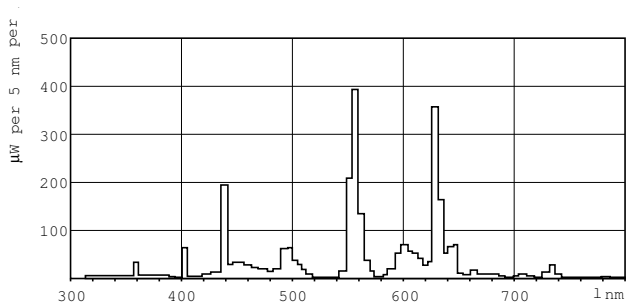


Lightcolor /840

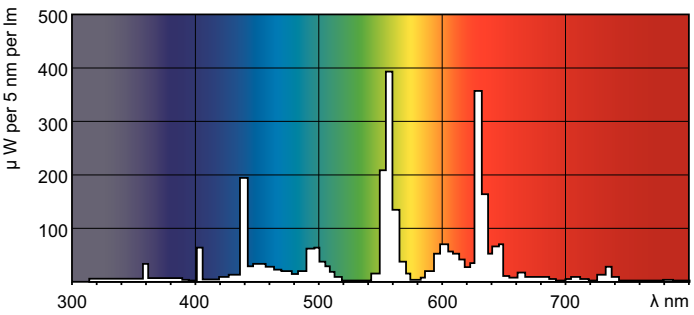


Lightcolor /840

MASTER TL-D Super 80


Lifetime

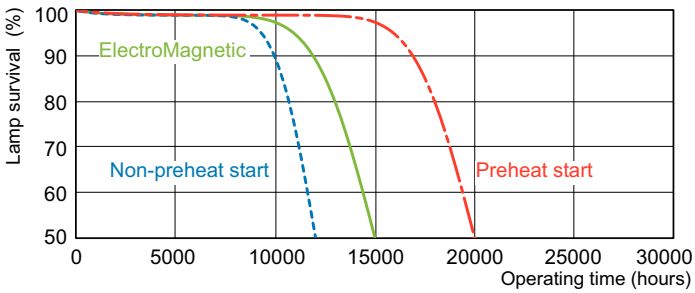

MASTER TL-D Super 80 Life Expectancy 3 h cycle

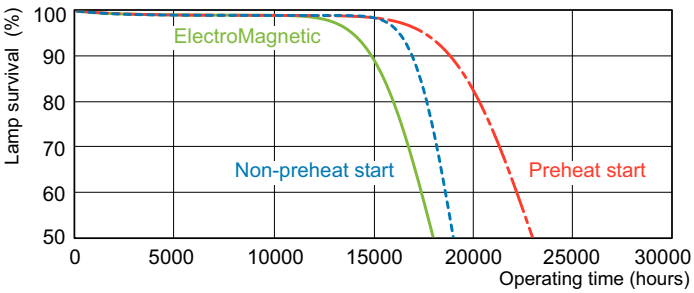

MASTER TL-D Super 80 Life Expectancy 12 h cycle

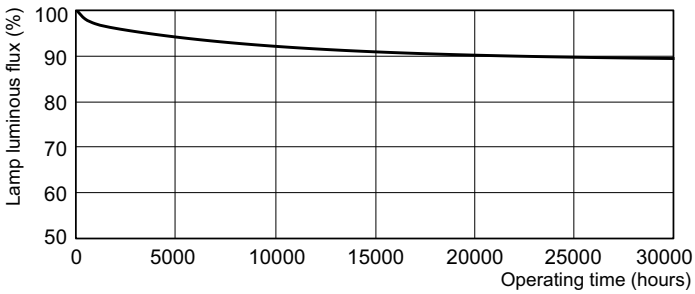

MASTER TL-D Super 80 Lumen Maintenance 3 h + 12 h cycle

© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.