

MSR Gold™ MiniFastFit (Touring/Stage)

MSR Gold™ 700/2 MiniFastFit 1CT/4

Thanks to the specially designed lamp base, the MSR Gold™ MiniFastFit takes just seconds to replace, to help ensure non-stop clubbing entertainment. In addition, the innovative gold plated pins ensure excellent current transfer to prolong lamp and lamp holder lifetimes and thereby reduce lamp replacement costs. Easy handling and small compact fixture designs are allowed by the lamps compact size, while the very short arc provides a high perceived brightness and high beam intensity.

Product data

General Information	
Cap-Base	PGJX28 [PGJX28]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Entertainment
Life to 50% Failures (Nom)	750 h
System Description	MiniFastFit

Light Technical	
Color Code	2
Luminous Flux (Min)	44000 lm
Luminous Flux (Nom)	47000 lm
Chromaticity Coordinate X (Nom)	300
Chromaticity Coordinate Y (Nom)	324
Correlated Color Temperature (Nom)	7200 K
Luminous Efficacy (Rated) (Nom)	69 lm/W
Color Rendering Index (Nom)	75

Operating and Electrical	
Power (Rated) (Nom)	700 W
Lamp Current (Nom)	10.2 A
Ignition Supply Voltage (Min)	198 V

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Cap-Base Information	PGJX28

Luminaire Design Requirements	
Bulb Temperature (Max)	950 °C
Pinch Temperature (Max)	500 °C

Product Data	
Full product code	871829122117300
Order product name	MSR Gold™ 700/2 MiniFastFit 1CT/4
EAN/UPC - Product	8718291221173
Order code	928199905115
Numerator - Quantity Per Pack	1


MSR Gold™ MiniFastFit (Touring/Stage)

Numerator - Packs per outer box	4
Material Nr. (12NC)	928199905115
Net Weight (Piece)	0.052 kg

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




MSR GOLD 700/2 MiniFastFit

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR Gold™ 700/2 MiniFastFit 1CT/4	23.2 mm	3.8 mm	55 mm	57 mm	56 mm	112 mm	36.5 mm	36 mm	35.3 mm

Photometric data

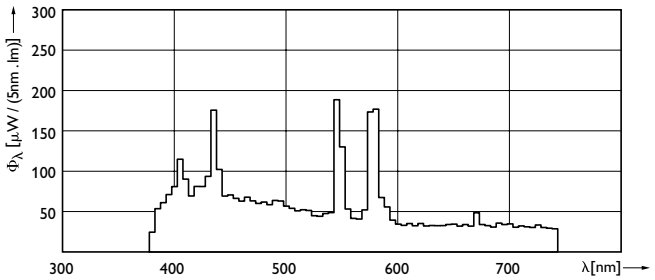

MSR Gold™ 575/2 MiniFastFit, MSR Gold™ 700/2 MiniFastFit

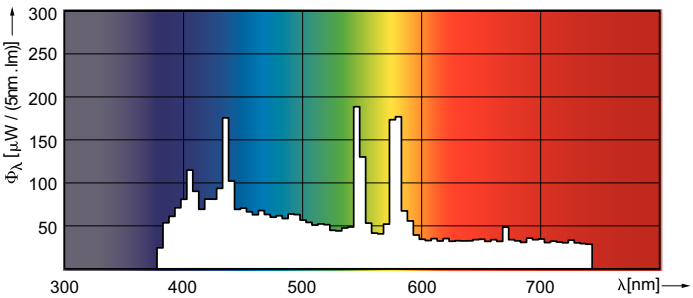

MSR Gold™ 575/2 MiniFastFit, MSR Gold™ 700/2 MiniFastFit

© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.