PHILIPS

Lighting



MSR Gold™ SA Double Ended

MSR Gold™ 1510 SA/DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Product data

General Information	
Cap-Base	SFC10-4 [SFC10-4]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Entertainment
Life to 50% Failures (Nom)	750 h
System Description	SA/DE

Light Technical	
Color Code	- [Not Specified]
Luminous Flux (Nom)	140000 lm
Chromaticity Coordinate X (Nom)	326
Chromaticity Coordinate Y (Nom)	336
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (Rated) (Nom)	93 lm/W
Color Rendering Index (Nom)	85

Operating and Electrical	
Power (Rated) (Nom)	1510 W
Lamp Current (Nom)	13.5 A
Ignition Supply Voltage (Min)	198 V

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Cap-Base Information	SFC10-4

Luminaire Design Requirements	
Bulb Temperature (Max)	950 °C
Pinch Temperature (Max)	450 °C

Product Data	
Full product code	871829122113500
Order product name	MSR Gold™ 1510 SA/DE 1CT/4
EAN/UPC - Product	8718291221135
Order code	928176605115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4


MSR Gold™ SA Double Ended

Material Nr. (12NC)	928176605115
Net Weight (Piece)	0.034 kg

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

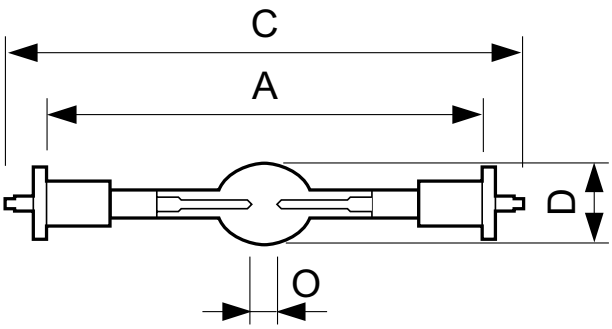


MSR GOLD 1510 SA/DE

Product	D (max)	O	A	C (max)
MSR Gold™ 1510 SA/DE 1CT/4	23.2 mm	7.0 mm	114.8 mm	136 mm

Photometric data

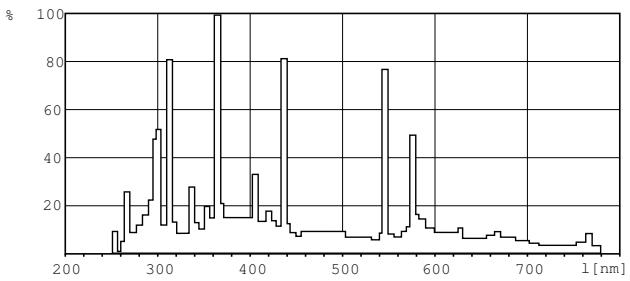

MSR Gold™ 1200 SA/DE, MSR Gold™ 1510 SA/DE

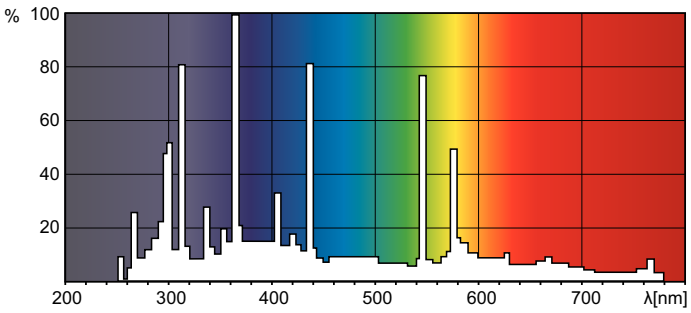

MSR Gold™ 1200 SA/DE, MSR Gold™ 1510 SA/DE

© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.