PHILIPS

Lighting



Actinic BL TL(-K) / TL-D(-K)

ACTINIC BL TL-DK - 30W/10 1SL

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Main Application	Insect traps
Life to 50% Failures (Nom)	2000 h
Useful Life (Nom)	2000 h

Light Technical	
Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	225
Chromaticity Coordinate Y (Nom)	230
UV Depreciation at 500 h	15 %
UV Depreciation at 1000 h	25 %
UV Depreciation at 2000 h	40 %

Operating and Electrical	
Power (Rated) (Nom)	30 W
Lamp Current (Nom)	0.805 A
Voltage (Nom)	45 V

Approval and Application	
Mercury (Hg) Content (Nom)	8.0 mg

UV	
UV-B/UV-A (IEC)	02 %
UV-A Radiation 100Hr (IEC)	6.6 W


Product Data	
Full product code	871150089346840
Order product name	ACTINIC BL TL-DK - 30W/10 1SL
EAN/UPC - Product	8711500893468
Order code	928019501029
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928019501029
Net Weight (Piece)	59.600 g

Actinic BL TL(-K) / TL-D(-K)

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
ACTINIC BL TL-DK - 30W/10 1SL	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

TL-DK 30W/10

Photometric data

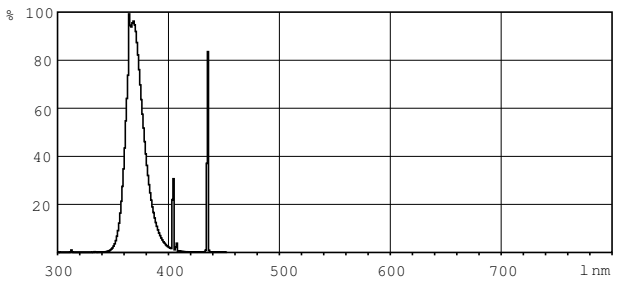

Lightcolor /10

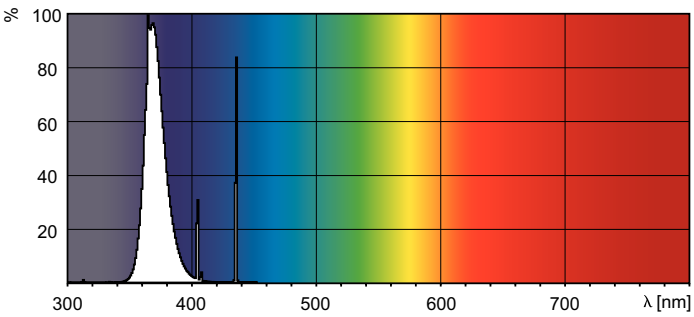

Lightcolor /10

© 2017 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.