

MSD

MSD 250/2 30H 1CT/4

These single ended, compact lamps enable optimal light collection and accurate beam control, while they also provide true daylight color temperatures – all to create great stage brightness and vivid entertainment. And since they offer long lifetime usage they help minimize the cost of ownership via fewer lamp replacements and fewer maintenance man hour costs.

Product data

General Information	
Cap-Base	GY9.5 [GY9.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Studio/Disco
Life to 50% Failures (Nom)	3000 h
System Description	-

Light Technical	
Color Code	850 [CCT of 5000K]
Luminous Flux (Min)	16000 lm
Luminous Flux (Nom)	18000 lm
Chromaticity Coordinate X (Nom)	289
Chromaticity Coordinate Y (Nom)	305
Correlated Color Temperature (Nom)	8100 K
Luminous Efficacy (Rated) (Nom)	72 lm/W
Color Rendering Index (Nom)	70

Operating and Electrical	
Power (Rated) (Nom)	250 W
Lamp Current (Nom)	3 A
Ignition Supply Voltage (Min)	207 V

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Cap-Base Information	-

Luminaire Design Requirements	
Bulb Temperature (Max)	500 °C
Pinch Temperature (Max)	350 °C


Product Data	
Full product code	871829122806600
Order product name	MSD 250/2 30H 1CT/4
EAN/UPC - Product	8718291228066
Order code	928099005115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928099005115
Net Weight (Piece)	0.030 kg

MSD

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




MSD 250/2 30H

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSD 250/2 30H 1CT/4	23 mm	5.0 mm	54 mm	56 mm	55 mm	108 mm	29 mm	28 mm	27 mm

Photometric data

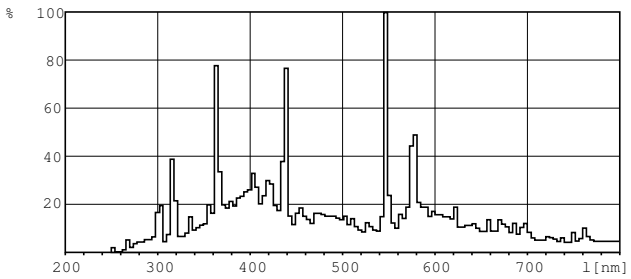

MSD

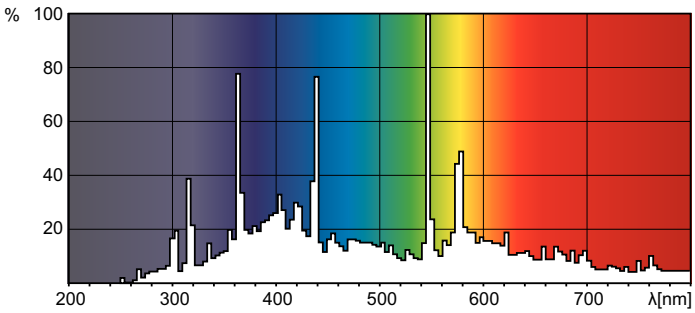

MSD

© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.