PHILIPS

Lighting



Accentline

Accentline 20W GU5.3 12V 36D 1CT/10X5F

Low-voltage halogen burner in glass reflector. Ideal solution for small decorative luminaires, putting your objects in the spotlight. Dichroic coating prevents heat transmission onto the object.

Product data

General Information	
Cap-Base	GU5.3 [GU5.3]
Philips Code	14596
Operating Position	UNIVERSAL [Any or Universal (U)]
ANSI Code Halogen	BAB
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

Light Technical	
Beam Angle (Nom)	36 °
Luminous Intensity (Max)	400 cd
Rated Beam Angle	36 °
Correlated Color Temperature (Nom)	3000 K
Color Rendering Index (Nom)	100

Operating and Electrical	
Power (Rated) (Nom)	20 W
Lamp Current (Nom)	1.67 A
Starting Time (Nom)	0.0 s
Voltage (Nom)	12 V

Controls and Dimming	
Dimmable	Yes


Approval and Application	
Energy Efficiency Label (EEL)	B

Luminaire Design Requirements	
Cap-Base Temperature (Max)	250 °C

Product Data	
Full product code	871150041199000
Order product name	Accentline 20W GU5.3 12V 36D 1CT/10X5F
EAN/UPC - Product	8711500411990
Order code	926000850033
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	926000850033
Net Weight (Piece)	0.032 kg
ILCOS Code	HRGI-50-12-GU5.3-20/36

Accentline

Dimensional drawing




FIGHTER 14596 20W GU5.3 12V MR16 36D

Product	D (max)	C (max)
Accentline 20W GU5.3 12V 36D 1CT/10X5F	51 mm	46 mm

Photometric data

Halogen: relative spectral power distribution

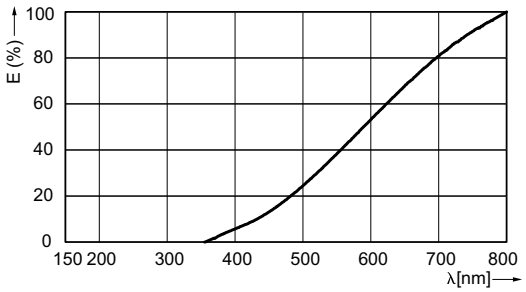

© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.