64641 HLX

Low-voltage halogen lamps without reflector



Areas of application

- Lamps for special luminaires
- Medical fiber optics (HLX)

Product benefits

- Compared to standard lamps up to 10 % higher luminous efficacy (HLX)
- Instant light (HLX)

Product features

- Xenon instead of krypton as the filler gas (XENOPHOT HLX versions)
- Luminous flux up to 10 % higher with same power consumption (XENOPHOT HLX versions)
- HLX tungsten halogen low-voltage lamp with or without reflector
- Dimmable (HLX)






© 2018, OSRAM GmbH. All rights reserved.

Technical data

Electrical data

Nominal voltage	17.0 V
Nominal wattage	150.00 W

Dimensions & weight

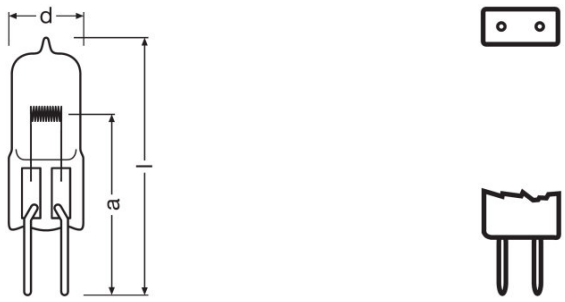

Diameter	11.5 mm
Length	50.0 mm
Light center length (LCL)	32.0 mm
Filament length	3.00 mm
Illuminated field	3.0*6.0 mm²
Filament diameter	6.0 mm

Lifespan

Lifespan	2000 h

Additional product data

Base (standard designation)	G6.35

Capabilities

Burning position	s135

Certificates & standards

EEI – Energy Label	B

Country specific categorizations

Order reference	64641 HLX


© 2018, OSRAM GmbH. All rights reserved.

Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4050300048260	OSRH64641HLX	-	-	-

© 2018, OSRAM GmbH. All rights reserved.





Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300048260	64641 HLX	Folding carton box 1	25 mm x 23 mm x 70 mm	0.04 dm^3	4.80 g
4050300890692	64641 HLX	Shipping carton box 40	144 mm x 107 mm x 121 mm	1.86 dm^3	233.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2018, OSRAM GmbH. All rights reserved.