QXL 93721 LL 750 W 77 V

QXL | High-performance lamps



Areas of application

- Entertainment
- Architainment

Product benefits

- Tool-less lamp exchange without opening the spotlight
- Developed in cooperation with Electronic Theatre Controls (ETC)

Product features

- Equipped with XS technology
- Maximum permitted base temperature: 500 °C
- Special bayonet base





© 2018, OSRAM GmbH. All rights reserved.

Technical data


Electrical data

Nominal voltage	77.0 V
Nominal wattage	750.00 W

Photometrical data

Nominal luminous flux	18000 lm
Color temperature	3050 K
Luminous efficacy	24 lm/W

Dimensions & weight

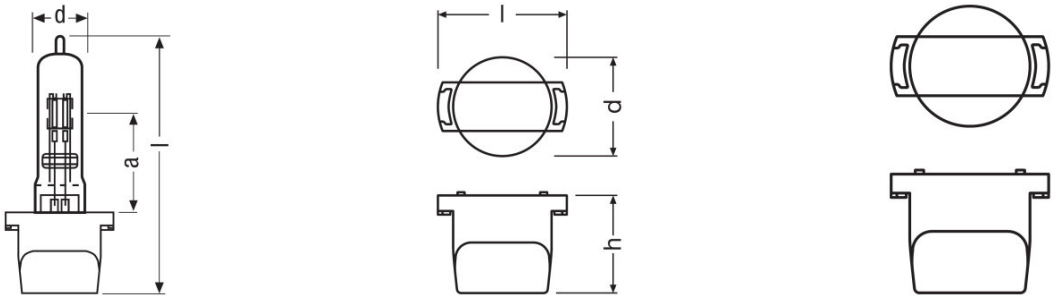

Diameter	18.5 mm
Length	104.0 mm
Light center length (LCL)	38.0 mm
Illuminated field	6.5*12 mm²
Filament diameter	12.0 mm

Lifespan

Lifespan	1500 h

Additional product data

Base (standard designation)	G9.5 [1)]

[1)] Quick exchange base

Capabilities

Burning position	Any

Certificates & standards

© 2018, OSRAM GmbH. All rights reserved.

EEI – Energy Label	C

Country specific categorizations

Order reference	93721 LL
ANSI code	Other

Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4008321090218	OSRQXL93721LL	-	-	-

© 2018, OSRAM GmbH. All rights reserved.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321090218	QXL 93721 LL 750 W 77 V	Folding carton box 1	133 mm x 43 mm x 47 mm	0.27 dm^3	89.33 g
4008321090225	QXL 93721 LL 750 W 77 V	Shipping carton box 12	178 mm x 148 mm x 139 mm	3.66 dm^3	1127.67 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2018, OSRAM GmbH. All rights reserved.