PRODUCT DATASHEET
O FACADE SPOT 8 W 3000 K IP54 WT

OUTDOOR FACADE SPOT | Luminaires with rotatable head and directional light

AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Adjustable modules: rotation angle 320°
- Diffuser made of opal polycarbonate
- Available in two housing colors: white and dark gray



© 2018, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

Electrical data

Operating mode	Mains voltage
Mains frequency	50/60 Hz
Power factor λ	>0.5
Nominal wattage	8.00 W
Nominal voltage	220...240 V
Nominal current	0.066 A


Photometrical data

Color temperature	3000 K
Luminous efficacy	60 lm/W
Luminous flux	460 lm
Light color (designation)	Warm White
Color rendering index Ra	≥80
Standard deviation of color matching	<6 sdcm


Light technical data

Beam angle	110 °

Dimensions & weight

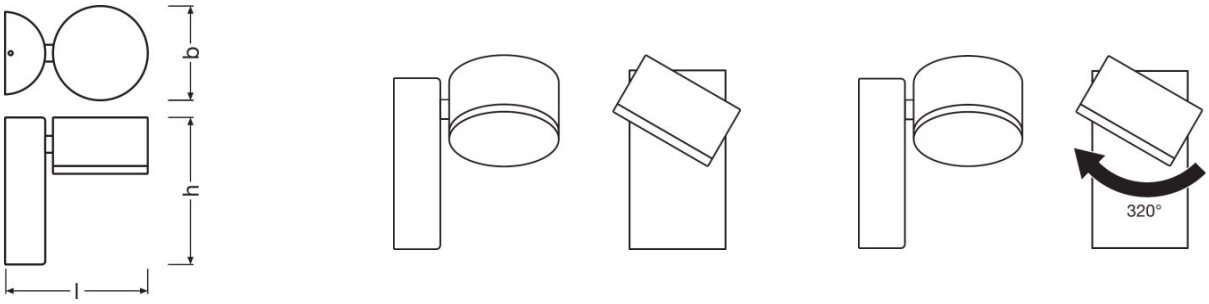

© 2018, LEDVANCE GmbH. All rights reserved.

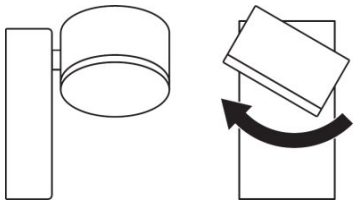

Length	135.0 mm
Width	90.0 mm
Height	140.0 mm
Product weight	600.00 g

Colors & materials

Housing color	White
Product color	White
Body material	Aluminum

Temperatures & operating conditions

Ambient temperature range	-20...40 °C

Lifespan

Number of switching cycles	15000
Lifespan L70 at 25 °C	30000 h

Additional product data

Mounting type	Surface
Mounting location	Wall
Product remark	Available from February 2018

Capabilities

Dimmable	No
Type of connection	Terminal, 3-Pole (L, N, PE)
LED module replaceable	Not replaceable

Certificates & standards

Type of protection	IP54
Protection class	I
Protection class IK (shock resistance)	IK06

© 2018, LEDVANCE GmbH. All rights reserved.

Photobiological safety group	RG 0
Standards	CE

EQUIPMENT / ACCESSORIES

– Complete mounting and connecting accessories included

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075074736	O FACADE SPOT 8 W 3000 K IP54 WT	Shipping carton box 6	385 mm x 170 mm x 355 mm	23.23 dm^3	4072.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

- www.ledvance.com/guarantee

DISCLAIMER

— Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2018, LEDVANCE GmbH. All rights reserved.