PRODUCT DATASHEET
DULUX L SP 18 W/840 2G11

OSRAM DULUX L SP | CFLni, with 4-pin 2G11 base for ECG/CCG operation, low temperatur



AREAS OF APPLICATION

- Street and city lighting
- Industry
- Applications with special thermal requirements

PRODUCT BENEFITS

- Very economical
- Optimum luminous flux at low ambient temperatures (+5 °C)
- Good quality of light
- Long service life

PRODUCT FEATURES

- Short and compact pin-base lamp with double-turn tubes
- Single-ended four-pin plug-in 2G11 base
- Average life: 20,000 h (with QUICKTRONIC)
- Color rendering index R_a: 80...89

© 2018, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA


Electrical data

Rated wattage	18.00 W
Nominal wattage	18.00 W

Photometrical data

Nominal luminous flux	1120 lm
Luminous flux at 25 °C	1200 lm
Rated luminous flux	1120 lm
Rated color temperature	4000 K
Color rendering index Ra	80...89
Rated LLMF at 4,000 h	0.86
Rated LLMF at 6,000 h	0.84
Rated LLMF at 8,000 h	0.81
Rated LLMF at 12,000 h	0.79
Rated LLMF at 16,000 h	0.78
Rated LLMF at 20,000 h	0.76
Light color (designation)	LUMILUX Cool White
Color temperature	4000 K
Luminous flux	1120 lm
Color rendering index Ra	80...89

Dimensions & weight



Diameter	16.0 mm
Overall length	206.5 mm
Tube diameter	17.5 mm
Length	209.0 mm
Length with base excl. base pins/connection	209.00 mm
Outer bulb	T16

© 2018, LEDVANCE GmbH. All rights reserved.

Maximum diameter	17.0 mm

Temperatures & operating conditions

Rated ambient temp.w.max.luminous flux	25.0 °C

Lifespan

Nominal lamp life time	20000 h
Rated lamp life time	20000 h
Service life	13000 h [1)]
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.95
Rated lamp survival factor at 16,000 h	0.81
Rated lamp survival factor at 20,000 h	0.50
Operation mode LLMF/LSF	HF
Lifespan	20000 h [1)]

[1)] With preheat ECG

Additional product data

Base (standard designation)	2G11
Mercury content	2.1 mg

Capabilities

Suitable for indoor	Yes

Certificates & standards


Energy efficiency class	A
Energy consumption	20 kWh/1000h
Energy efficiency class	A

Country-specific categorizations

ILCOS	FSD//L-18/840-E-2G11-43,9/209

© 2018, LEDVANCE GmbH. All rights reserved.

Light Distribution

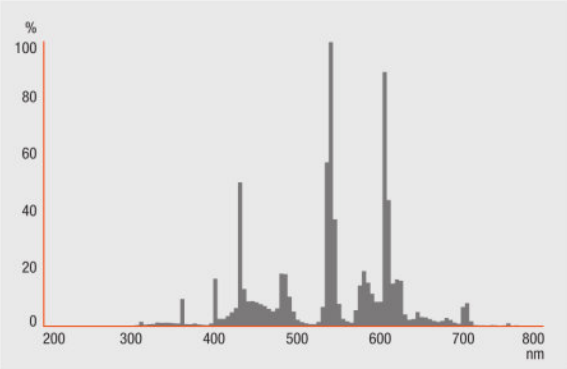

Spectral power distribution

EQUIPMENT / ACCESSORIES

– Suitable for operation on electronic and conventional control gear

SAFETY ADVICE

In case of lamp breakage: www.ledvance.com/brokenlamp

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321280497	DULUX L SP 18 W/840 2G11	Shipping carton box 10	260 mm x 119 mm x 136 mm	4.21 dm^3	794.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2018, LEDVANCE GmbH. All rights reserved.

OSRAM DULUX L SP | CFLni, with 4-pin 2G11 base for ECG/CCG operation, low temperatur

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Luminous flux at 35 °C	Number of lighting outlets
DULUX L SP 18 W/840 2G11	QT 1x18 DIM	4008321645647	0.08 A	18.90 W	1350 lm	1
	QT 2x18 DIM	4008321645852	0.17 A	37.70 W	1350 lm	2
	QT-ECO 1x18-24/220-240 L	4050300660417	0.13 A	18.00 W	1200 lm	1
	QT-ECO 1x18-24/220-240 S	4050300638560	0.13 A	18.00 W	1200 lm	1
	QTi 1x18 DIM		0.08 A	19.00 W	1200 lm	1
	QTi 3x18 DIM	4008321069931	0.24 A	53.60 W	1200 lm	3
	QTi 4x18 DIM	4008321070012	0.31 A	69.30 W	1200 lm	4
	QTi DALI 1x18 DIM	4050300870403	0.08 A	18.00 W	1200 lm	1
	QTi DALI 2x18 DIM	4050300870526	0.16 A	37.00 W	1200 lm	2
	QTi DALI 3x18 DIM	4008321069979	0.24 A	53.60 W	1200 lm	3
	QTi DALI 4x18 DIM	4008321070050	0.31 A	69.30 W	1200 lm	4
	QTP-DL 1x18-24	4008321117861	0.085 A	18.00 W	1200 lm	1
	QTP-DL 2x18-24	4008321117885	0.16 A	36.00 W	1200 lm	2
	QTP-M 1x26-42	4008321329134	0.09 A	18.00 W	1150 lm	1
	QTP-M 2x26-32	4008321329158	0.16 A	36.00 W	1150 lm	2
	QTP-OPTIMAL 1x18-40	4008321873743	0.09 A	19.00 W	1150 lm	1
	QTP-OPTIMAL 2x18-40	4008321873767	0.16 A	36.00 W	1150 lm	2

Product name	Product name ECG	EAN	EEI – Energy Label
DULUX L SP 18 W/840 2G11	QT 1x18 DIM	4008321645647	
	QT 2x18 DIM	4008321645852	
	QT-ECO 1x18-24/220-240 L	4050300660417	A2
	QT-ECO 1x18-24/220-240 S	4050300638560	A2
	QTi 1x18 DIM		

© 2018, LEDVANCE GmbH. All rights reserved.

Product name	Product name ECG	EAN	EEI – Energy Label
	QTi 3x18 DIM	4008321069931	
	QTi 4x18 DIM	4008321070012	
	QTi DALI 1x18 DIM	4050300870403	
	QTi DALI 2x18 DIM	4050300870526	
	QTi DALI 3x18 DIM	4008321069979	
	QTi DALI 4x18 DIM	4008321070050	
	QTP-DL 1x18-24	4008321117861	
	QTP-DL 2x18-24	4008321117885	
	QTP-M 1x26-42	4008321329134	
	QTP-M 2x26-32	4008321329158	
	QTP-OPTIMAL 1x18-40	4008321873743	
	QTP-OPTIMAL 2x18-40	4008321873767	

© 2018, LEDVANCE GmbH. All rights reserved.