Trios

LRM8116/00 SENSR MOV DET WIDE



Passive infrared movement detector for energy-saving solutions. Adjustable switch-off delay time of up to 35 minutes. Electrical connections via an additional cable with a modular socket (“snap-in”).The daylight override function can prevent the lights being switched on if enough daylight is available.LRM8116 – Wall-mounted for indoor lighting applications.Detects movement within an angle of 90° (maximum range 15 m at a mounting height of 2.1 m).For Trios and LMM systems.LRM8117 – Trunking-mounted for aisle way applications such as high-rack storage areas in distribution centers (automatic light switching/ dimming based on occupancy). Can be used for TTX400 trunking in combination with the dedicated mounting bracket ZTX 400 MB- It provides coverage in the aisle way depending on the mounting height (for instance coverage of 20 m long and 0.70 m wide when mounted 10 m above the floor).

Danych wyrobów

- Podstawowe informacje

Wzór	SENSR MOV DET WIDE


- Dane produktu

Kod zamówienia	518411 99
Kod produktu	871155951841199
Nazwa produktu	LRM8116/00 SENSR MOV DET WIDE
Nazwa produktu na zamówieniu	LRM8116/00 SENSR MOV DET WIDE
Liczba sztuk w opakowaniu	1
Opakowanie zbiorcze	12
Liczba opakowan w kartonie zbiorczym	12
Kod kreskowy na produkcie	8711559518411
Kod kreskowy na opakowaniu zbior-czym	8711559518428
Kod logistyczny - 12NC	913700317103
Waga netto 1 szt.	0.065 kg


PHILIPS

sense and simplicity

Rysunki techniczne

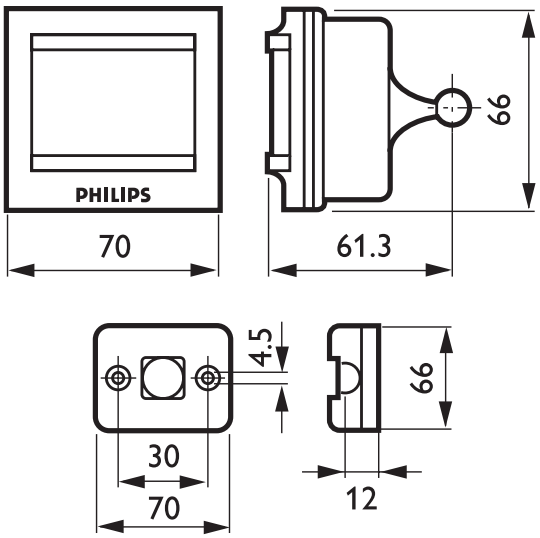

LRM8116/00 SENSR MOV DET WIDE

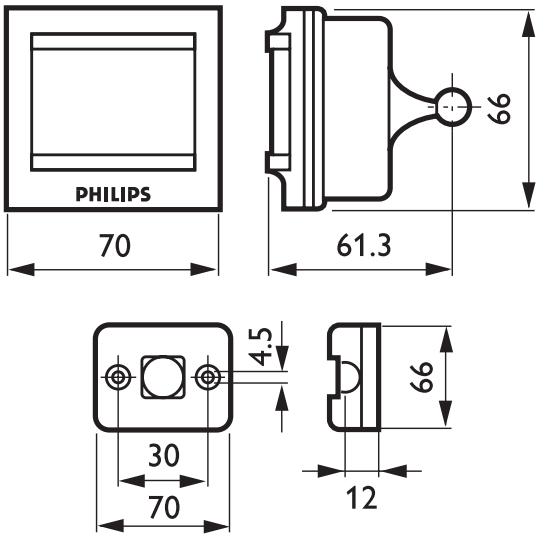

LRM8116/00 SENSR MOV DET WIDE

© 2013 Koninklijke Philips Electronics N.V.
Wszelkie prawa zastrzeżone

Dane mogą ulec zmianie bez uprzedniego powiadomienia. Znak towarowy jest własnością Koninklijke Philips Electronics N.V. lub odpowiednich podmiotów .

www.philips.com/lighting

2013, Kwiecień 10
Dane wkrótce ulegną zmianie