PRODUCT FAMILY DATASHEET
Vintage 1906 LED

LED lamps, vintage edition



AREAS OF APPLICATION

- Perfect for decorative installations
- Domestic applications
- General illumination
- Outdoor use in outdoor luminaires only (minimum IP65)

PRODUCT BENEFITS

- Very low energy consumption
- Instant 100 % light, no warm-up time
- Can be easily fitted instead of ordinary light bulbs
- Lamps with innovative LED "filament" technology

PRODUCT FEATURES

- LED lamps for line voltage
- Lamp made of glass
- Lifetime: up to 15,000 h
- Beam angle: up to 360°
- Good quality of light; color rendering index R_a: ≥ 80; constant chromaticity



© 2020, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

	Electrical data				Photometrical data				
Product description	**Nominal wattage**	**Nominal voltage**	**Max. lamp no. on circuit break. 10 A (B)**	**Max. lamp no. on circuit break. 16 A (B)**	**Lumen main.fact.at end of nom.life time**	**Light color (designation)**	**Color temper-ature**	**Luminous flux**	**Color render-ing index Ra**
Vintage 1906 LED 12 1.4 W/2500K E14 [1)]	1.40 W	220...240 V			0.70	Warm White	2500 K	120 lm	≥80
1906 LED CLAS B 12 1.5 W/2400K E14 [1)]	1.50 W	220...240 V	416	666	0.70	Warm White	2400 K	120 lm	≥80
1906 LED CLAS P 12 1.5 W/2400K E14 [1)]	1.50 W	220...240 V	416	666	0.70	Warm White	2400 K	120 lm	≥80
1906 LED CLAS BA 12 1.5 W/2400K E14 [1)]	1.50 W	220...240 V	416	666	0.70	Warm White	2400 K	120 lm	≥80
1906 LED CLAS BW 12 1.5 W/2400K E14 [1)]	1.50 W	220...240 V	416	666	0.70	Warm White	2400 K	120 lm	≥80
1906 LED CLAS A 12 5 W/1800K E27 [1)]	5.00 W	220...240 V	90	150	0.70	Warm Comfort Light	1800 K	110 lm	≥80
1906 LED GLOBE 12 5 W/1800K E27 [1)]	5.00 W	220...240 V	90	150	0.70	Warm Comfort Light	1800 K	110 lm	≥80
RF1906 CLAS ST 15 5 W/1800K E27 [1)]	5.00 W	220...240 V	90	150	0.70	Warm Comfort Light	1800 K	140 lm	≥80
1906 LED TUBE 20 CL 2.5 W/2000K E27 [1)]	2.50 W	220...240 V	200	300	0.70	Warm Comfort Light	2000 K	200 lm	≥80
Vintage 1906 LED 22 2.8 W/2400K E14 [1)]	2.80 W	220...240 V			0.70	Warm White	2400 K	220 lm	≥80
RF1906 GLOBE 22 2.5 W/2400K E27 [1)]	2.50 W	220...240 V	920	1472	0.70	Warm White	2400 K	220 lm	≥80
1906 LED CLAS A 22 2.5 W/2400K E27 [1)]	2.50 W	220...240 V	263	421	0.70	Warm White	2400 K	220 lm	≥80
Vintage 1906 LED 22 2.5 W/2400K E14 [1)]	2.50 W	220...240 V			0.70	Warm White	2400 K	220 lm	≥80
ST CLAS P 22 2.5 W/2400K E14 [1)]	2.50 W	220...240 V	263	421	0.70	Warm White	2400 K	220 lm	≥80
1906 LED CLAS BA 22 2.5 W/2400K E14 [1)]	2.50 W	220...240 V	263	421	0.70	Warm White	2400 K	220 lm	≥80
1906 LED CLAS BW 22 2.5 W/2400K E14 [1)]	2.50 W	220...240 V	263	421	0.70	Warm White	2400 K	220 lm	≥80

© 2020, LEDVANCE GmbH. All rights reserved.

	Electrical data				Photometrical data				
Product description	**Nominal wattage**	**Nominal voltage**	**Max. lamp no. on circuit break. 10 A (B)**	**Max. lamp no. on circuit break. 16 A (B)**	**Lumen main.fact.at end of nom.life time**	**Light color (designation)**	**Color temper-ature**	**Luminous flux**	**Color render-ing index Ra**
RF1906 GLOBE 25 CL 5 W/2000K E27 [1)]	5.00 W	220...240 V	18	29	0.70	Warm Comfort Light	2000 K	250 lm	≥80
RF1906 GLOBE 15 5 W/1800K E27 [1)]	5.00 W	220...240 V	90	150	0.70	Warm Comfort Light	1800 K	140 lm	≥80
1906 LED CLAS A 28 5 W/2000K E27 [1)]	5.00 W	220...240 V	18	29	0.70	Warm Comfort Light	2000 K	300 lm	≥80
RF1906 GLOBE 28 5 W/2000K E27 [1)]	5.00 W	220...240 V	18	29	0.70	Warm Comfort Light	2000 K	300 lm	≥80
1906 LED TUBE 35 CL 5 W/2000K E27 [1)]	5.00 W	220...240 V	90	150	0.70	Warm Comfort Light	2000 K	400 lm	≥80
1906 LED CLAS A 35 4 W/2400K E27 [1)]	4.00 W	220...240 V	156	250	0.70	Warm White	2400 K	410 lm	≥80
RF1906 GLOBE 35 CL 4 W/2400K E27 [1)]	4.00 W	220...240 V	510	817	0.70	Warm White	2400 K	410 lm	≥80
Vintage 1906 LED 36 4.5 W/2500K E14 [1)]	4.50 W	220...240 V			0.70	Warm White	2500 K	420 lm	≥80
Vintage 1906 LED 36 4.5 W/2500K E14 [1)]	4.50 W	220...240 V			0.70	Warm White	2500 K	420 lm	≥80
RF1906 GLOBE 36 4.5 W/2500K E27 [1)]	4.50 W	220...240 V	100	150	0.70	Warm White	2500 K	420 lm	≥80
1906 LED CLAS B 35 4 W/2400K E14 [1)]	4.00 W	220...240 V	156	250	0.70	Warm White	2400 K	410 lm	≥80
1906 LED CLAS P 35 4 W/2400K E14 [1)]	4.00 W	220...240 V	156	250	0.70	Warm White	2400 K	410 lm	≥80
1906 LED OVAL 36 4.5 W/2500K E27 [1)]	4.50 W	220...240 V	25	40	0.70	Warm Comfort Light	2500 K	420 lm	≥80
Vintage 1906 LED 40 4.5 W/2500K E27 [1)]	4.50 W	220...240 V	25	40	0.70	Warm White	2500 K	470 lm	≥80
Vintage 1906 LED Diamond 40 CL 4.5 W/2500K E27 [1)]	4.50 W	220...240 V	25	40	0.70	Warm Comfort Light	2500 K	470 lm	≥80
Vintage 1906 LED Pine 40 4.5 W/2500K E27 [1)]	4.50 W	220...240 V	18	29	0.70	Warm Comfort Light	2500 K	470 lm	≥80
Vintage 1906 LED 40 4.5 W/2500K E27 [1)]	4.50 W	220...240 V	25	40	0.70	Warm White	2500 K	470 lm	≥80

© 2020, LEDVANCE GmbH. All rights reserved.

	Electrical data				Photometrical data				
Product description	**Nominal wattage**	**Nominal voltage**	**Max. lamp no. on circuit break. 10 A (B)**	**Max. lamp no. on circuit break. 16 A (B)**	**Lumen main.fact.at end of nom.life time**	**Light color (designation)**	**Color temper-ature**	**Luminous flux**	**Color render-ing index Ra**
Vintage 1906 LED 40 4.5 W/2500K E27 [1)]	4.50 W	220…240 V	25	40	0.70	Warm White	2500 K	470 lm	≥80
RF1906 GLOBE 52 CL 7 W/2700K E27 [1)]	7.00 W	220…240 V	60	100	0.70	Warm White	2700 K	680 lm	≥80
RF1906 GLOBE 54 6.5 W/2400K E27 [1)]	6.50 W	220…240 V	328	525	0.70	Warm White	2400 K	720 lm	≥80
1906 LED CLAS A 55 6.5 W/2400K E27 [1)]	6.50 W	220…240 V	96	154	0.70	Warm White	2400 K	725 lm	≥80
1906 LED CLAS A 68 8 W/2500K E27 [1)]	8.00 W	220…240 V			0.70	Warm White	2500 K	950 lm	≥80
1906 LED CLAS A 68 8 W/2500K E27 [1)]	8.00 W	220…240 V	81	131	0.70	Warm White	2500 K	950 lm	≥80
RF1906 CLAS ST 22 2.5 W/2400K E27 [1)]	2.50 W	220…240 V	920	1472	0.70	Warm White	2400 K	220 lm	≥80
RF1906 CLAS ST 25 5 W/2000K E27 [1)]	5.00 W	220…240 V	18	29	0.70	Warm Comfort Light	2000 K	250 lm	≥80
RF1906 CLAS ST 4 W/2500K E27 CL [1)]	4.00 W	220…240 V	510	817	0.70	Warm White	2500 K	420 lm	≥80

	Light technical data		Dimensions & weight	Temperatures & operating conditions	Lifespan		Additional product data	
Product description	**Warm-up time (60 %)**	**Starting time**	**Overall length**	**Ambient temperature range**	**Nominal lamp life time**	**Number of switching cycles**	**Base (standard designation)**	**Mercury-free**
Vintage 1906 LED 12 1.4 W/2500K E14 [1)]	< 0.50 s	< 0.5 s	125.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
1906 LED CLAS B 12 1.5 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	100.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
1906 LED CLAS P 12 1.5 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	77.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
1906 LED CLAS BA 12 1.5 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	121.0 mm	-20…+40 °C	15000 h	100000	E14	Yes

© 2020, LEDVANCE GmbH. All rights reserved.

	Light technical data		Dimensions & weight	Temperatures & operating conditions	Lifespan		Additional product data	
Product description	**Warm-up time (60 %)**	**Starting time**	**Overall length**	**Ambient temperature range**	**Nominal lamp life time**	**Number of switching cycles**	**Base (standard designation)**	**Mercury-free**
1906 LED CLAS BW 12 1.5 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	100.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
1906 LED CLAS A 12 5 W/1800K E27 [1)]	< 0.50 s	< 0.5 s	290.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
1906 LED GLOBE 12 5 W/1800K E27 [1)]	< 0.50 s	< 0.5 s	283.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
RF1906 CLAS ST 15 5 W/1800K E27 [1)]	< 0.50 s	< 0.5 s	140.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
1906 LED TUBE 20 CL 2.5 W/2000K E27 [1)]	< 0.50 s	< 0.5 s	138.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
Vintage 1906 LED 22 2.8 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	121.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
RF1906 GLOBE 22 2.5 W/2400K E27 [1)]	< 0.50 s	< 0.5 s	168.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
1906 LED CLAS A 22 2.5 W/2400K E27 [1)]	< 0.50 s	< 0.5 s	105.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
Vintage 1906 LED 22 2.5 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	100.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
ST CLAS P 22 2.5 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	77.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
1906 LED CLAS BA 22 2.5 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	121.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
1906 LED CLAS BW 22 2.5 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	100.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
RF1906 GLOBE 25 CL 5 W/2000K E27 [1)]	< 0.50 s	< 0.5 s	178.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
RF1906 GLOBE 15 5 W/1800K E27 [1)]	< 0.50 s	< 0.5 s	178.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
1906 LED CLAS A 28 5 W/2000K E27 [1)]	< 0.50 s	< 0.5 s	290.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
RF1906 GLOBE 28 5 W/2000K E27 [1)]	< 0.50 s	< 0.5 s	283.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
1906 LED TUBE 35 CL 5 W/2000K E27 [1)]	< 0.50 s	< 0.5 s	185.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
1906 LED CLAS A 35 4 W/2400K E27 [1)]	< 0.50 s	< 0.5 s	105.0 mm	-20…+40 °C	15000 h	100000	E27	Yes

© 2020, LEDVANCE GmbH. All rights reserved.

	Light technical data		Dimensions & weight	Temperatures & operating conditions	Lifespan		Additional product data	
Product description	**Warm-up time (60 %)**	**Starting time**	**Overall length**	**Ambient temperature range**	**Nominal lamp life time**	**Number of switching cycles**	**Base (standard designation)**	**Mercury-free**
RF1906 GLOBE 35 CL 4 W/2400K E27 [1)]	< 0.50 s	< 0.5 s	168.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
Vintage 1906 LED 36 4.5 W/2500K E14 [1)]	< 0.50 s	< 0.5 s	97.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
Vintage 1906 LED 36 4.5 W/2500K E14 [1)]	< 0.50 s	< 0.5 s	78.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
RF1906 GLOBE 36 4.5 W/2500K E27 [1)]	< 0.50 s	< 0.5 s	140.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
1906 LED CLAS B 35 4 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	100.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
1906 LED CLAS P 35 4 W/2400K E14 [1)]	< 0.50 s	< 0.5 s	77.0 mm	-20…+40 °C	15000 h	100000	E14	Yes
1906 LED OVAL 36 4.5 W/2500K E27 [1)]	< 0.50 s	< 0.5 s	156.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
Vintage 1906 LED 40 4.5 W/2500K E27 [1)]	< 0.50 s	< 0.5 s	165.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
Vintage 1906 LED Diamond 40 CL 4.5 W/2500K E27 [1)]	< 0.50 s	< 0.5 s	140.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
Vintage 1906 LED Pine 40 4.5 W/2500K E27 [1)]	< 0.50 s	< 0.5 s	168.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
Vintage 1906 LED 40 4.5 W/2500K E27 [1)]	< 0.50 s	< 0.5 s	165.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
Vintage 1906 LED 40 4.5 W/2500K E27 [1)]	< 0.50 s	< 0.5 s	122.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
RF1906 GLOBE 52 CL 7 W/2700K E27 [1)]	< 0.50 s	< 0.5 s	178.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
RF1906 GLOBE 54 6.5 W/2400K E27 [1)]	< 0.50 s	< 0.5 s	168.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
1906 LED CLAS A 55 6.5 W/2400K E27 [1)]	< 0.50 s	< 0.5 s	105.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
1906 LED CLAS A 68 8 W/2500K E27 [1)]	< 0.50 s	< 0.5 s	105.0 mm	-20…+40 °C	15000 h	100000	E27	Yes

© 2020, LEDVANCE GmbH. All rights reserved.

	Light technical data		Dimensions & weight	Temperatures & operating conditions	Lifespan		Additional product data	
Product description	**Warm-up time (60 %)**	**Starting time**	**Overall length**	**Ambient temperature range**	**Nominal lamp life time**	**Number of switching cycles**	**Base (standard designation)**	**Mercury-free**
1906 LED CLAS A 68 8 W/2500K E27 [1)]	< 0.50 s	< 0.5 s	105.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
RF1906 CLAS ST 22 2.5 W/2400K E27 [1)]	< 0.50 s	< 0.5 s	143.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
RF1906 CLAS ST 25 5 W/2000K E27 [1)]	< 0.50 s	< 0.5 s	140.0 mm	-20…+40 °C	15000 h	100000	E27	Yes
RF1906 CLAS ST 4 W/2500K E27 CL [1)]	< 0.50 s	< 0.5 s	145.0 mm	-20…+40 °C	15000 h	100000	E27	Yes

	Capabilities	Certificates & standards		Country-specific categorizations
Product description	**Dimmable**	**Energy efficiency class**	**Energy consumption**	**ILCOS**
Vintage 1906 LED 12 1.4 W/2500K E14 [1)]	No	A++	2 kWh/1000h	
1906 LED CLAS B 12 1.5 W/2400K E14 [1)]	No	A++	2 kWh/1000h	
1906 LED CLAS P 12 1.5 W/2400K E14 [1)]	No	A++	2 kWh/1000h	
1906 LED CLAS BA 12 1.5 W/2400K E14 [1)]	No	A++	2 kWh/1000h	
1906 LED CLAS BW 12 1.5 W/2400K E14 [1)]	No	A++	2 kWh/1000h	
1906 LED CLAS A 12 5 W/1800K E27 [1)]	No	A+	5 kWh/1000h	
1906 LED GLOBE 12 5 W/1800K E27 [1)]	No	A	5 kWh/1000h	
RF1906 CLAS ST 15 5 W/1800K E27 [1)]	No	A	5 kWh/1000h	
1906 LED TUBE 20 CL 2.5 W/2000K E27 [1)]	No	A+	3 kWh/1000h	
Vintage 1906 LED 22 2.8 W/2400K E14 [1)]	No	A+	3 kWh/1000h	

© 2020, LEDVANCE GmbH. All rights reserved.


	Capabilities	Certificates & standards		Country-specific categorizations
Product description	**Dimmable**	**Energy efficiency class**	**Energy consumption**	**ILCOS**
RF1906 GLOBE 22 2.5 W/2400K E27 [1)]	No	A++	3 kWh/1000h	DRAG/C-2,8/827-220/240-E27-125
1906 LED CLAS A 22 2.5 W/2400K E27 [1)]	No	A+	3 kWh/1000h	
Vintage 1906 LED 22 2.5 W/2400K E14 [1)]	No	A++	3 kWh/1000h	
ST CLAS P 22 2.5 W/2400K E14 [1)]	No	A++	3 kWh/1000h	
1906 LED CLAS BA 22 2.5 W/2400K E14 [1)]	No	A++	3 kWh/1000h	
1906 LED CLAS BW 22 2.5 W/2400K E14 [1)]	No	A++	3 kWh/1000h	
RF1906 GLOBE 25 CL 5 W/2000K E27 [1)]	No	A	5 kWh/1000h	
RF1906 GLOBE 15 5 W/1800K E27 [1)]	No	A	5 kWh/1000h	
1906 LED CLAS A 28 5 W/2000K E27 [1)]	No	A+	5 kWh/1000h	
RF1906 GLOBE 28 5 W/2000K E27 [1)]	No	A+	5 kWh/1000h	
1906 LED TUBE 35 CL 5 W/2000K E27 [1)]	No	A+	5 kWh/1000h	
1906 LED CLAS A 35 4 W/2400K E27 [1)]	No	A++	4 kWh/1000h	
RF1906 GLOBE 35 CL 4 W/2400K E27 [1)]	No	A++	4 kWh/1000h	DRAG/C-4/824-220/240-E27-124
Vintage 1906 LED 36 4.5 W/2500K E14 [1)]	No	A+	5 kWh/1000h	
Vintage 1906 LED 36 4.5 W/2500K E14 [1)]	No	A+	5 kWh/1000h	
RF1906 GLOBE 36 4.5 W/2500K E27 [1)]	No	A+	5 kWh/1000h	
1906 LED CLAS B 35 4 W/2400K E14 [1)]	No	A++	4 kWh/1000h	
1906 LED CLAS P 35 4 W/2400K E14 [1)]	No	A++	4 kWh/1000h	
1906 LED OVAL 36 4.5 W/2500K E27 [1)]	No	A+	5 kWh/1000h	

© 2020, LEDVANCE GmbH. All rights reserved.


	Capabilities	Certificates & standards		Country-specific categorizations
Product description	**Dimmable**	**Energy efficiency class**	**Energy consumption**	**ILCOS**
Vintage 1906 LED 40 4.5 W/2500K E27 [1)]	No	A+	5 kWh/1000h	
Vintage 1906 LED Diamond 40 CL 4.5 W/2500K E27 [1)]	No	A+	5 kWh/1000h	
Vintage 1906 LED Pine 40 4.5 W/2500K E27 [1)]	No	A++	5 kWh/1000h	
Vintage 1906 LED 40 4.5 W/2500K E27 [1)]	No	A+	5 kWh/1000h	
Vintage 1906 LED 40 4.5 W/2500K E27 [1)]	No	A+	5 kWh/1000h	
RF1906 GLOBE 52 CL 7 W/2700K E27 [1)]	No	A+	7 kWh/1000h	
RF1906 GLOBE 54 6.5 W/2400K E27 [1)]	No	A++	7 kWh/1000h	DRAG/C-7/827-220/240-E27-125
1906 LED CLAS A 55 6.5 W/2400K E27 [1)]	No	A+	7 kWh/1000h	
1906 LED CLAS A 68 8 W/2500K E27 [1)]	No	A++	8 kWh/1000h	
1906 LED CLAS A 68 8 W/2500K E27 [1)]	No	A++	8 kWh/1000h	
RF1906 CLAS ST 22 2.5 W/2400K E27 [1)]	No	A++	3 kWh/1000h	DRAS/C-2,8/824-220-240-E27-64
RF1906 CLAS ST 25 5 W/2000K E27 [1)]	No	A	5 kWh/1000h	
RF1906 CLAS ST 4 W/2500K E27 CL [1)]	No	A++	4 kWh/1000h	DRAS/C-4/824-220/240-E27-64

[1)] All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value


© 2020, LEDVANCE GmbH. All rights reserved.

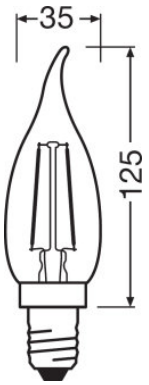


Vintage 1906 LED 12 1.4 W/2500K E14, Vintage 1906 LED 22 2.8 W/2400K E14

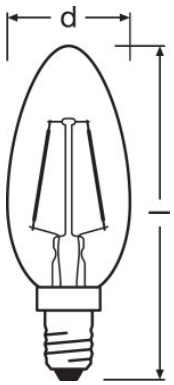


1906 LED CLAS B 12 1.5 W/2400K E14, Vintage 1906 LED 22 2.5 W/2400K E14

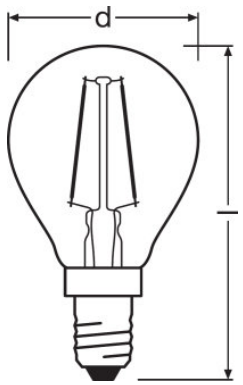


1906 LED CLAS P 12 1.5 W/2400K E14, ST CLAS P 22 2.5 W/2400K E14




1906 LED CLAS BA 12 1.5 W/2400K E14, 1906 LED CLAS BA 22 2.5 W/2400K E14

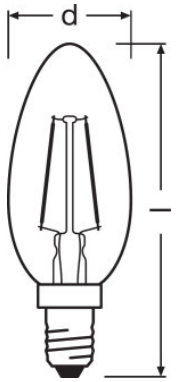


1906 LED CLAS BW 12 1.5 W/2400K E14, 1906 LED CLAS BW 22 2.5 W/2400K E14

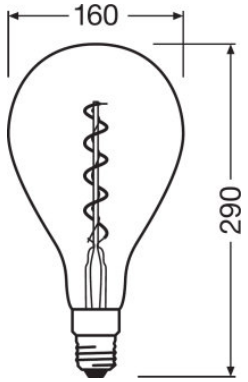

1906 LED CLAS A 12 5 W/1800K E27

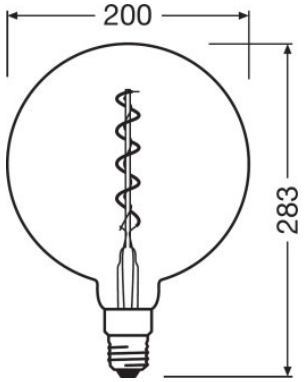


1906 LED GLOBE 12 5 W/1800K E27

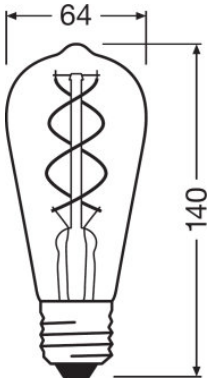


RF1906 CLAS ST 15 5 W/1800K E27


© 2020, LEDVANCE GmbH. All rights reserved.




1906 LED TUBE 20 CL 2.5 W/2000K E27

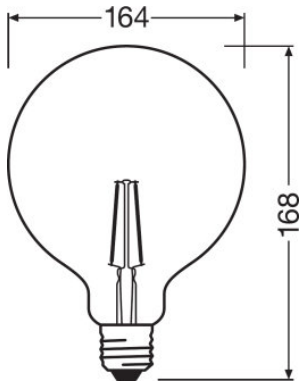


RF1906 GLOBE 22 2.5 W/2400K E27

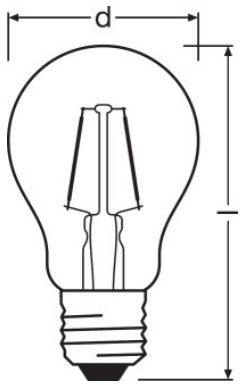


1906 LED CLAS A 22 2.5 W/2400K E27

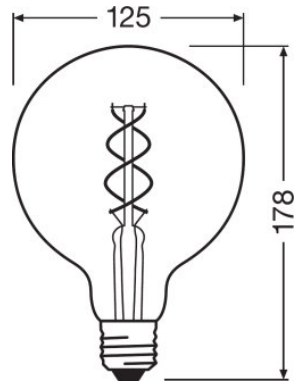


RF1906 GLOBE 25 CL 5 W/2000K E27

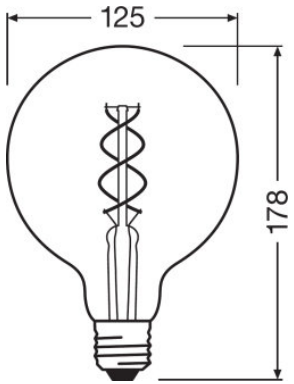


RF1906 GLOBE 15 5 W/1800K E27

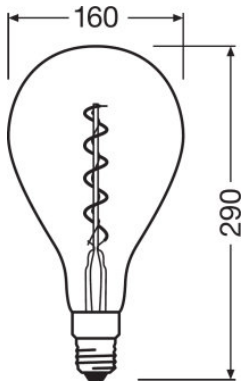

1906 LED CLAS A 28 5 W/2000K E27

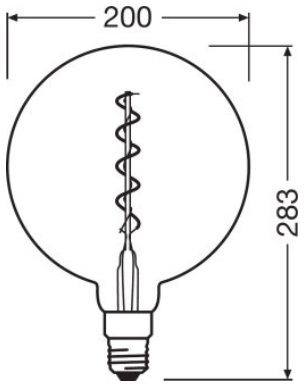


RF1906 GLOBE 28 5 W/2000K E27




1906 LED TUBE 35 CL 5 W/2000K E27


© 2020, LEDVANCE GmbH. All rights reserved.

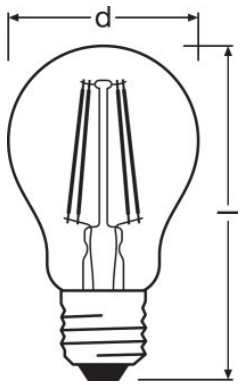


1906 LED CLAS A 35 4 W/2400K E27,
1906 LED CLAS A 55 6.5 W/2400K E27,
1906 LED CLAS A 68 8 W/2500K E27

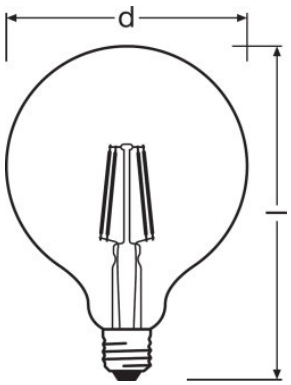


RF1906 GLOBE 35 CL 4 W/2400K E27,
RF1906 GLOBE 54 6.5 W/2400K E27

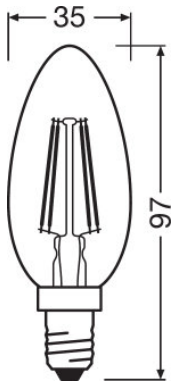


Vintage 1906 LED 36 4.5 W/2500K E14

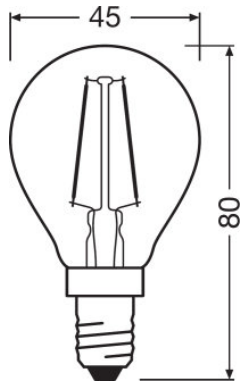


Vintage 1906 LED 36 4.5 W/2500K E14

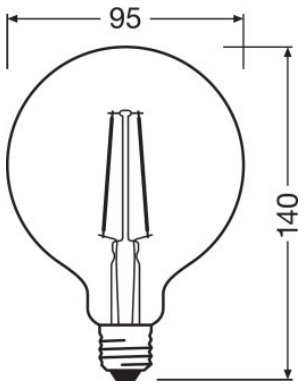


RF1906 GLOBE 36 4.5 W/2500K E27

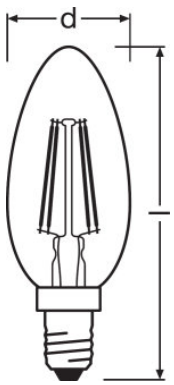

1906 LED CLAS B 35 4 W/2400K E14

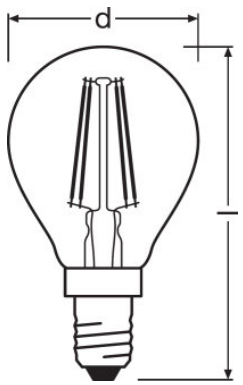


1906 LED CLAS P 35 4 W/2400K E14

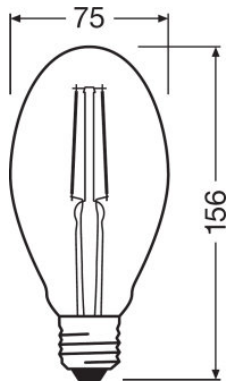


1906 LED OVAL 36 4.5 W/2500K E27


© 2020, LEDVANCE GmbH. All rights reserved.

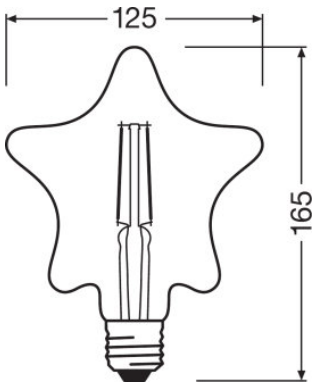


Vintage 1906 LED 40 4.5 W/2500K E27

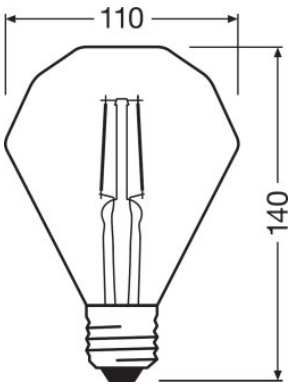


Vintage 1906 LED Diamond 40 CL 4.5 W/2500K E27

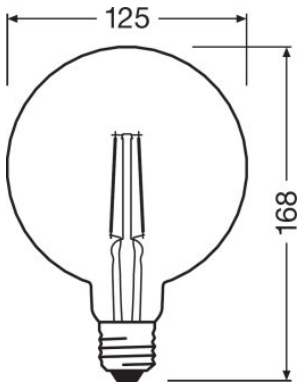


Vintage 1906 LED Pine 40 4.5 W/2500K E27

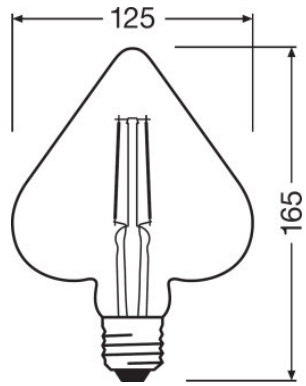


Vintage 1906 LED 40 4.5 W/2500K E27

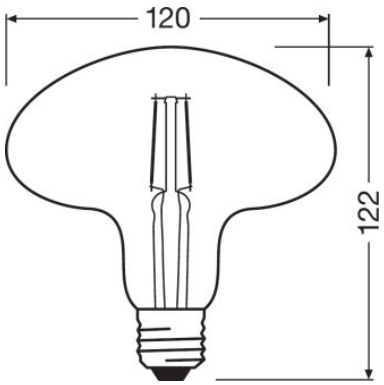


Vintage 1906 LED 40 4.5 W/2500K E27

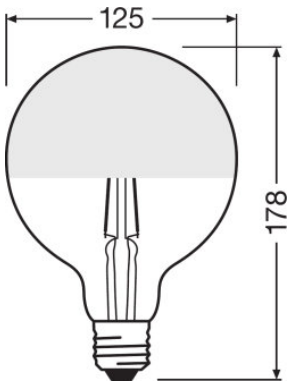

RF1906 GLOBE 52 CL 7 W/2700K E27

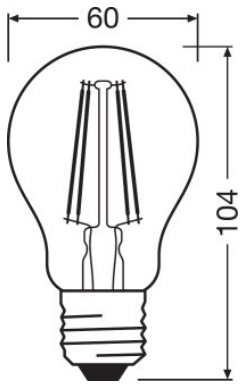


1906 LED CLAS A 68 8 W/2500K E27

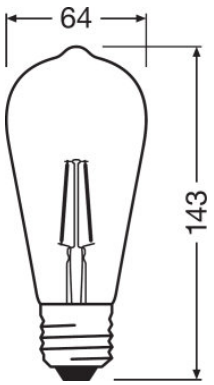


RF1906 CLAS ST 22 2.5 W/2400K E27

© 2020, LEDVANCE GmbH. All rights reserved.

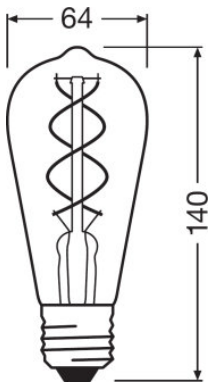

RF1906 CLAS ST 25 5 W/2000K E27

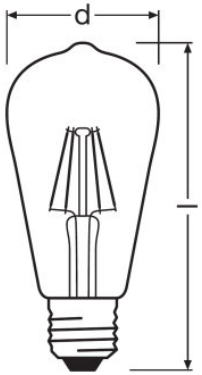

RF1906 CLAS ST 4 W/2500K E27 CL

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075119437	Shipping carton box 4	185 mm x 185 mm x 182 mm	330.00 g	6.23 dm^3
4058075290020	Shipping carton box 10	246 mm x 104 mm x 147 mm	308.00 g	3.76 dm^3
4058075290808	Shipping carton box 10	246 mm x 104 mm x 147 mm	326.00 g	3.76 dm^3
4058075290440	Shipping carton box 10	246 mm x 104 mm x 182 mm	352.00 g	4.66 dm^3
4058075290150	Shipping carton box 10	246 mm x 104 mm x 147 mm	383.00 g	3.76 dm^3

© 2020, LEDVANCE GmbH. All rights reserved.

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075269910	Shipping carton box 4	394 mm x 394 mm x 388 mm	2375.00 g	60.23 dm³
4058075269934	Shipping carton box 4	474 mm x 474 mm x 388 mm	2895.00 g	87.17 dm³
4058075269958	Shipping carton box 4	185 mm x 185 mm x 206 mm	504.00 g	7.05 dm³
4058075809604	Shipping carton box 4	185 mm x 185 mm x 206 mm	429.00 g	7.05 dm³
4058075119451	Shipping carton box 4	185 mm x 185 mm x 182 mm	330.00 g	6.23 dm³
4058075810419	Shipping carton box 4	291 mm x 291 mm x 251 mm	945.00 g	21.25 dm³
4058075290754	Shipping carton box 10	317 mm x 132 mm x 158 mm	602.00 g	6.61 dm³
4058075290082	Shipping carton box 10	246 mm x 104 mm x 147 mm	367.00 g	3.76 dm³
4058075290822	Shipping carton box 10	246 mm x 104 mm x 147 mm	351.00 g	3.76 dm³
4058075290471	Shipping carton box 10	246 mm x 104 mm x 182 mm	372.00 g	4.66 dm³
4058075290327	Shipping carton box 10	246 mm x 104 mm x 147 mm	348.00 g	3.76 dm³
4058075092143	Shipping carton box 4	291 mm x 291 mm x 251 mm	1112.00 g	21.25 dm³
4058075269996	Shipping carton box 4	291 mm x 291 mm x 251 mm	1112.00 g	21.25 dm³
4058075092006	Shipping carton box 4	394 mm x 394 mm x 388 mm	2375.00 g	60.23 dm³
4058075092020	Shipping carton box 4	474 mm x 474 mm x 388 mm	2895.00 g	87.17 dm³
4058075809611	Shipping carton box 4	185 mm x 185 mm x 262 mm	519.00 g	8.97 dm³

© 2020, LEDVANCE GmbH. All rights reserved.

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075293106	Shipping carton box 10	317 mm x 132 mm x 158 mm	548.00 g	6.61 dm³
4052899962569	Shipping carton box 4	291 mm x 291 mm x 251 mm	952.00 g	21.25 dm³
4058075119390	Shipping carton box 4	185 mm x 185 mm x 182 mm	330.00 g	6.23 dm³
4058075119598	Shipping carton box 4	185 mm x 185 mm x 182 mm	462.00 g	6.23 dm³
4058075269835	Shipping carton box 4	233 mm x 233 mm x 251 mm	691.00 g	13.63 dm³
4058075293441	Shipping carton box 10	246 mm x 104 mm x 147 mm	344.00 g	3.76 dm³
4058075293502	Shipping carton box 10	246 mm x 104 mm x 147 mm	357.00 g	3.76 dm³
4058075091986	Shipping carton box 4	185 mm x 185 mm x 206 mm	550.00 g	7.05 dm³
4058075092082	Shipping carton box 4	233 mm x 233 mm x 223 mm	928.00 g	12.11 dm³
4058075091962	Shipping carton box 4	233 mm x 233 mm x 223 mm	1010.00 g	12.11 dm³
4058075092044	Shipping carton box 4	291 mm x 291 mm x 251 mm	1340.00 g	21.25 dm³
4058075092105	Shipping carton box 4	233 mm x 233 mm x 223 mm	876.00 g	12.11 dm³
4058075092068	Shipping carton box 4	291 mm x 291 mm x 183 mm	1006.00 g	15.50 dm³
4058075091948	Shipping carton box 4	291 mm x 291 mm x 251 mm	1094.00 g	21.25 dm³
4058075810839	Shipping carton box 4	291 mm x 291 mm x 251 mm	973.00 g	21.25 dm³
4058075293304	Shipping carton box 10	317 mm x 132 mm x 158 mm	605.00 g	6.61 dm³

© 2020, LEDVANCE GmbH. All rights reserved.

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075119314	Shipping carton box 4	185 mm x 185 mm x 182 mm	394.00 g	6.23 dm^3
4058075293366	Shipping carton box 10	317 mm x 132 mm x 158 mm	615.00 g	6.61 dm^3
4058075810136	Shipping carton box 4	185 mm x 185 mm x 206 mm	442.00 g	7.05 dm^3
4058075092129	Shipping carton box 4	185 mm x 185 mm x 206 mm	504.00 g	7.05 dm^3
4052899962583	Shipping carton box 4	185 mm x 185 mm x 206 mm	580.00 g	7.05 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2020, LEDVANCE GmbH. All rights reserved.