OT FIT 30/220...240/125 D L

OPTOTRONIC FIT D L | Linear / Area Constant Current – Non dimmable



Product family features

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Versatile scope of application due to output power range of up to 50 W
- Supply voltage: 220...240 V
- Available with output current range: up to 350 mA
- Non-isolated drivers

Product family benefits

- Small housing design
- Fixed current
- Lifetime: up to 100,000 h (temperature at T_C = 65 °C, max. 10 % failure rate)
- High quality of light thanks to low output ripple current
- High efficiency
- Fulfill safety requirement due to overload, overtemperature, Hot Plug protection

Areas of application

- Linear lighting for office, education, industry, storage areas and retail
- Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- Suitable for luminaires of protection class I

© 2022, OSRAM GmbH. All rights reserved.

Technical data

Electrical data

Nominal input voltage	220…240 V
Mains frequency	0/50/60 Hz
Input voltage AC	198…264 V [1)]
Input voltage DC	176…276 V
Current set	Fixed current
Total harmonic distortion	< 20 %
Power factor λ	> 0.95 [2)]
Efficiency in full-load	90 % [3)]
Device power loss	3.0 W [4)]
Protective conductor current	<2.0 mA
Max. ECG no. on circuit breaker 10 A (B)	35
Max. ECG no. on circuit breaker 16 A (B)	56
Max. ECG no. on circuit breaker 25 A (B)	-
Surge capability (L/N-Ground)	2 kV
Surge capability (L-N)	1 kV
Nominal output voltage	54…216 V
U-OUT (working voltage)	< 250 V
Nominal output current	125 mA [5)]
Output current tolerance	±10 %
Output ripple current (100 Hz)	< 10 %
Output PSTLM	≤1
Output SVM	≤0.4
Nominal output power	6.8…27 W [6)]
Maximum output power	27 W
Galvanic isolation	Non isolated

1) Permitted voltage range

2) Full load at 230 V


3) at 230 V, 50 Hz

4) Maximum


5) ±10%

6) Partial load 7…27 W


© 2022, OSRAM GmbH. All rights reserved.

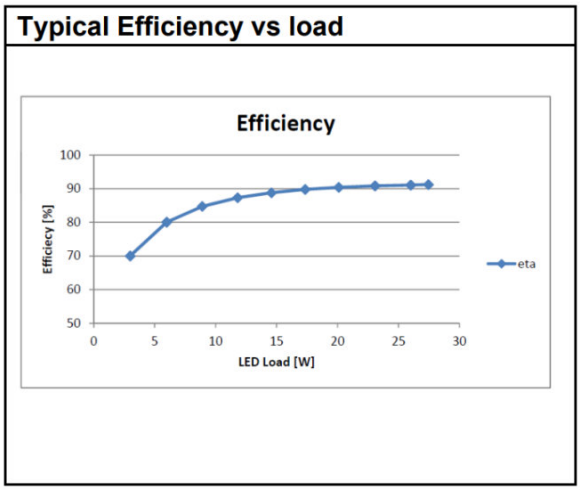


OT FIT 30220-240125 D L Typical Efficiency vs. Load (230 V 50 Hz)

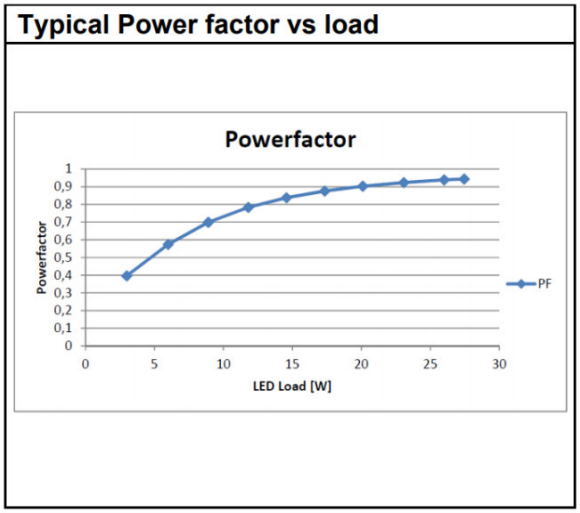

OT FIT 30220-240125 D L Typical Power Factor vs. Load

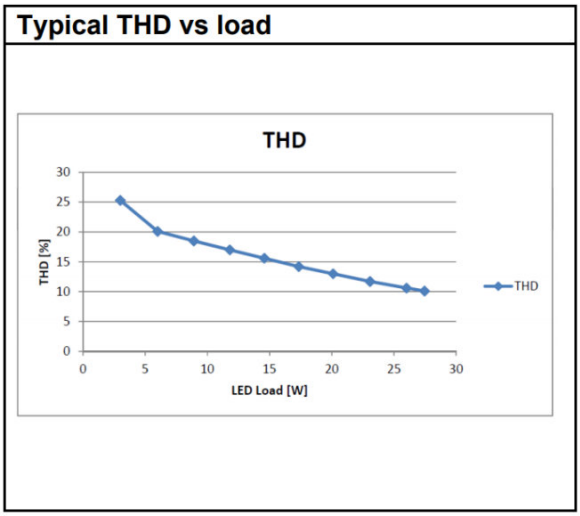


OT FIT 30220-240125 D L Typical THD Vs Load

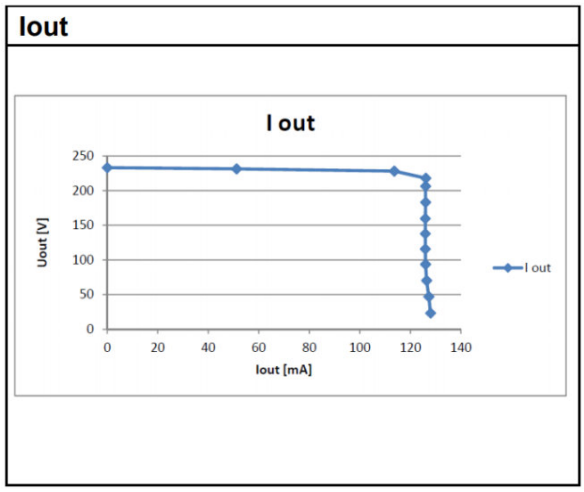

OT FIT 30220-240125 D L Typical Iout vs Rset (LEDset2 mode)

© 2022, OSRAM GmbH. All rights reserved.

Dimensions & weight

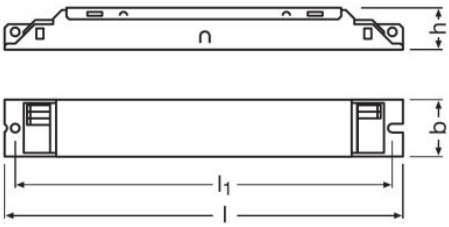

Mounting hole spacing, length	200.0 mm
Product weight	125.00 g
Cable cross-section, input side	0.5…1.5 mm² [1]
Cable cross-section, output side	0.5…1.5 mm² [1]
Wire preparation length, input side	8.5…9.5 mm
Wire preparation length, output side	8.5…9.5 mm
Length	210.0 mm
Width	30.0 mm
Height	21.0 mm

[1] Solid or flexible leads

Colors & materials

Casing material	Metal

Temperatures & operating conditions

Ambient temperature range	-15…+50 °C
Maximum temperature at tc test point	75 °C [1]
Max.housing temperature in case of fault	110 °C
Temperature range at storage	-25…85 °C
Permitted rel. humidity during operation	5…85 % [2]

[1] Maximum at the Tc-point

[2] Maximum 56 days/year at 85 %

Lifespan

ECG lifetime	50000 / 100000 h [1]

[1] At maximum T_c = 75°C / 10% failure rate / At T_c = 65°C / 10% failure rate

Capabilities

© 2022, OSRAM GmbH. All rights reserved.

Dimmable	No
Overheating protection	Automatic reversible
Overload protection	Automatic reversible
Short-circuit protection	Automatic reversible
No-load proof	Yes
Intended for no-load operation	No
Max. cable length to lamp/LED module	2.0 m [1)]
Suitable for fixtures with prot. class	I
Type of connection, input side	Push terminal
Type of connection, output side	Push terminal
Number of channels	1

[1)] Output wires must be routed as close as possible to each other

Certificates & standards

Approval marks – approval	CE / EL / VDE-ENEC / VDE-EMC / EAC / CCC / BIS / RCM
Standards	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386
Protection class	I
Type of protection	IP20

Logistical data

Commodity code	850440829000

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACh)	
Date of Declaration	14-04-2022
Primary Article Identifier	4052899222557
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	2005cf8a-eeb8-4a40-88e1-bc5fc62133b5

Download Data

File

© 2022, OSRAM GmbH. All rights reserved.

	Certificates INOTEC Certificate OT FIT 30125 D L
	Certificates INOTEC Certificate OT FIT 30125 D L appendix
	Certificates OT ENEC 40038085 010322
	Certificates CCC certificate China Origin
	Certificates 544466_CD Test Certificate
	Certificates CCC Certificate 2017171002001468
	Declarations of conformity OT FIT D L CE 4292770 150222
	Declarations of conformity OT FIT D L UK DoC 4289774 140222
	CAD data OT FIT D L IGS 261119
	CAD data OT FIT D L STEP 261119
	CAD Data 2-dim OT FIT D L CAD2PDF 261119
	CAD data 3-dim OT FIT D L CAD3PDF 261119

Ecodesign regulation information:

Intended for use with LED modules.
The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899222557	OT FIT 30/220...240/125 D L	Shipping carton box 20	234 mm x 161 mm x 101 mm	3.81 dm^3	2665.00 g

© 2022, OSRAM GmbH. All rights reserved.

Logistical Data

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2022, OSRAM GmbH. All rights reserved.