Neumüller
Elektronik GmbH

NFC Programmable LED Driver

240W | Isolated Dimming

■ Features



- Supply Voltage: 90-305Vac or 127-420Vdc, 380Vac for 2 hours
- Great Surge Immunity 10kV
- -55℃Cold Ambient Startup (Optional)
- 100,000Hour Life @ Tc=75℃
- Airset™ NFC Programmability
- +/-2% Output Current Accuracy (Programmable Model)
- Isolated 0-10V/PWM/Time/DALI /DMX (Optional) Dimmable
- Dim Off with 0.5W Standby Power
- 12V 300mA Auxiliary Power to Power Controllers and Fans
- UL Class P, ENEC/CB/CCC SELV Output
- Safety according to EN 61347-1, 61347-2-3, 61347-2-13, 62384

■ Application

- Bay lights, Pole lights, Stadium lights

■ Model List (See appendix for more details about the operation range)

Model Number	Input Voltage Range	Output Power	Output Voltage	Full Power Settable Current Min	Full Power Settable Current Max	Certification
BLD-240-C105-XYZ	90 ~ 305 Vac	250 W	143-357Vdc	700mA	1050mA	UL/FCC/CB/ENEC/CCC
BLD-240-C140-XYZ	90 ~ 305 Vac	250 W	107-238Vdc	1050mA	1400mA	UL/FCC/CB/ENEC/CCC
BLD-240-C210-XYZ	90 ~ 305 Vac	250 W	71-179Vdc	1400mA	2100mA	UL/FCC/CB/ENEC/CCC
BLD-240-C280-XYZ	90 ~ 305 Vac	250 W	50-114Vdc	2100mA	2800mA	UL/FCC/CB/ENEC/CCC
BLD-240-C420-XYZ	90 ~ 305 Vac	250 W	36-89Vdc	2800mA	4200mA	UL/FCC/CB/ENEC/CCC
BLD-240-C690-XYZ	90 ~ 305 Vac	250 W	22-52Vdc	4800mA	6900mA	UL/FCC/CB/ENEC/CCC

XY=	Dimming Method	Programmable	12Vaux	Dim-off
NN	-	-	-	-
DN	0-10V	Cable	-	**No** Dim-off as **default status**, programmed to have Dim-off
EN	0-10V	Cable	300mA	√
TR	Time/Set Current	NFC Wireless	-	-
DR	0-10V	NFC Wireless	-	**No** Dim-off as **default status**, programmed to have Dim-off
ER	0-10V/PWM/Time	NFC Wireless	300mA	√
AR	DALI	NFC Wireless	-	√

Z = U, UL cable with ground wire S, VDE cable/Class I D, VDE cable/Class II

Rev. C | Date: 13.Apr 2021

NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

■ Technical Data

Input Voltage	90～305Vac or 127V-420Vdc, 380Vac for 2 hours
Input Frequency	47～63Hz
Power Factor	>0.95@60-100%load, refer to PF vs. Load curve
THD	<15%@60-100%load, refer to THD vs. Load curve
Input Current	2.2Amax@120Vac & Full-Load, 1.1Amax@220Vac & Full-Load
Inrush Current	65A peak, 1.2ms duration, <0.25A2s@230Vac, Cold Start 70A peak, 1.3ms duration, <0. 5A2s@277Vac, Cold Start
Leakage Current	1mA max @277Vac 60Hz, UL8750,0.75mAmax @240Vac 50Hz, IEC61347-1
Input Under Voltage	Shut down and auto-restart
Input Over Voltage	*Optional: Shutdown @320Vac
Surge Protection	Line to line 6kV, line to ground 10kV, IEC 61000-4-5
Current Accuracy	±5%Io
Ripple Current	Ip-p:5%Io max
Setup Time	1.2s max
Overshoot	10% Io max & LED Load
Output Over Voltage	120% Vomax, typ.
Short Circuit	Auto recovery. The output recovers when short is removed.
Over Temperature	Lower the output current when Tc≧105±10℃; Auto Recovery When Tc≦70±10℃
Auxiliary Power (Vaux)	12V+/-5%, 300mA max
Operating Temperature	Case Temperature Tc=-40℃～+90℃； 10%RH～100%RH
Storage Temperature	-40℃～+85℃； 5%RH～100%RH
MTBF	≥280,000 hours, 75℃ case temperature (MIL-HDBK-217F)
Lifetime	≥100,000 hours, 75℃ case temperature, refer to life vs. Tc curve
Case Temperature	90℃ max, marked in the Tc point of label
Dimensions	8.46x2.66x1.32 by inch (body), 9.52x2.66x1.32 by inch (endcaps included)
	215.0x67.5x33.5 by mm (body), 242.0x67.5x33.5 by mm (endcaps included)
Net Weight	1200g
Packing	20pcs/Carton/22kg, 490 x 370 x 190 by mm

Notes: Unless specified, all the test results are measured in 25℃ room temperature.

* marked items are optional and contact with sales people to get the functions.

NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

■ Safety/EMC Compliance

Safety Standard	Description
UL8750	Light emitting diode(LED) equipment for use in lighting products
UL1012	Power units other than class 2
IEC 61347-1	Lamp control gear Part 1: general and safety requirements
IEC 61347-2-13	Lamp control gear Part 2-13: particular requirement for d.c. or a.c. supplied electronic control gear for LED modules
EMI Standards	Description
IEC 55015	Conducted emission test & radiated emission test
IEC 61000-3-2	Harmonic current emissions; Class C
IEC 61000-3-3	Voltage fluctuations & flicker
FCC Part 15	ANSI C63.4:2009 Class B
EMS Standards	Description
IEC 61000-4-2	Electrostatic discharge (ESD): 8 kV air discharge, 4 kV contact discharge
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment


■ Dimming


Parameter	Min.	Typ.	Max.
Vdim Sourcing Current	200uA	300uA	450uA
Vdim Allowed Input Voltage	-20 V		20 V
0-10V Dimming Range	10% (Vdim=1V)	Linear	100% (Vdim=9~10V)
PWM Dimming Range	10% (Duty=10%)	Linear	100% (Duty=90-100%)
Dim off threshold	0.4V or 4%	0.5V or 5%	0.6V or 6%
Dim on threshold	0.6V or 6%	0.7V or 7%	0.8V or 8%
PWM High	3.8V		10V
PWM Low	0V		0.6V
PWM Frequency	300Hz		2kHz
External PWM Controller Current Sinking Capability	300uA		
DALI Interface Standard		IEC62386	
DA1,DA2 High Level	9.5	16	22.5
DA1,DA2 Low Level	-6.5	0	6.5
DA1,DA2 Current	0		2mA

NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com


- **Dimming Curve**


a. Without dim-off

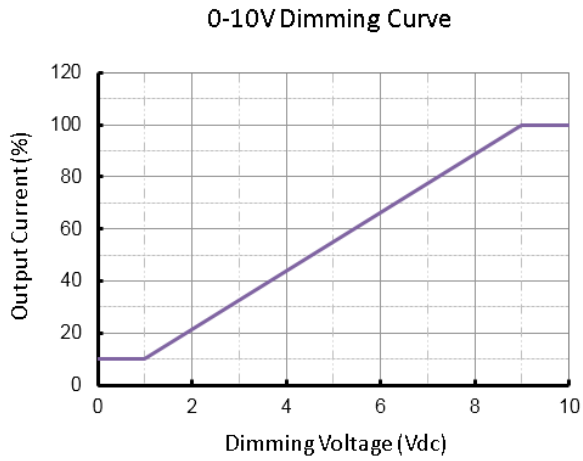

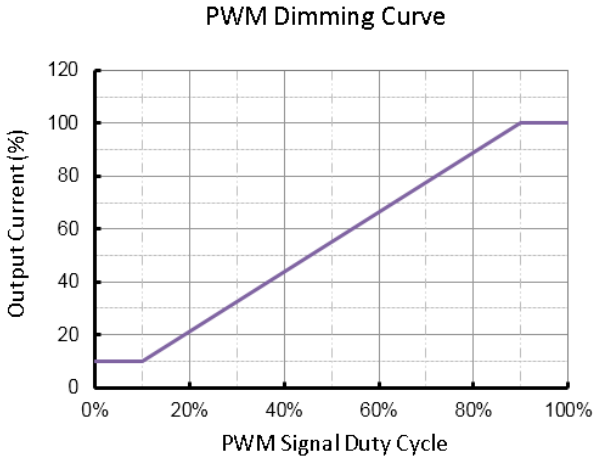


b. With dim-off

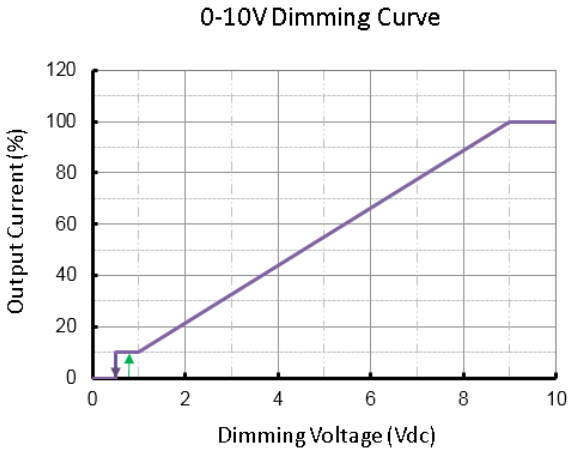

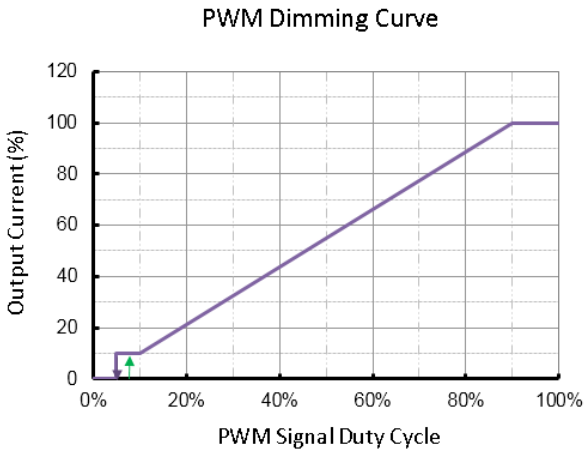


- **Dimming Wiring**

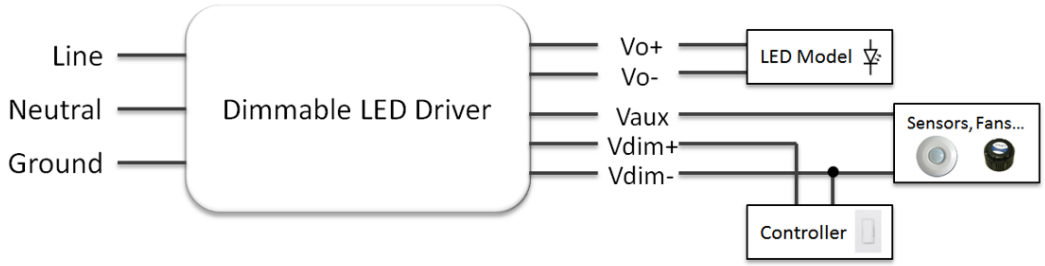


NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

■ Lifetime vs. Case Temperature

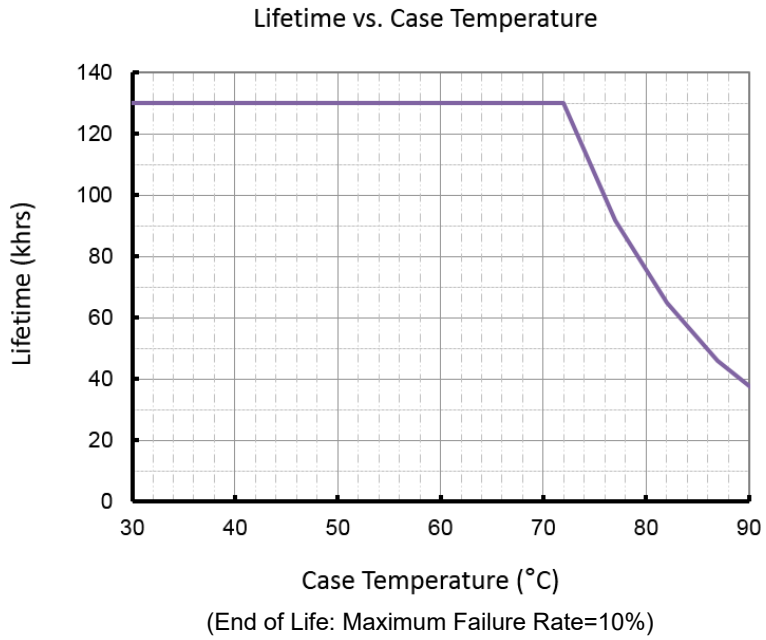


(End of Life: Maximum Failure Rate=10%)

■ Power Factor vs. Load

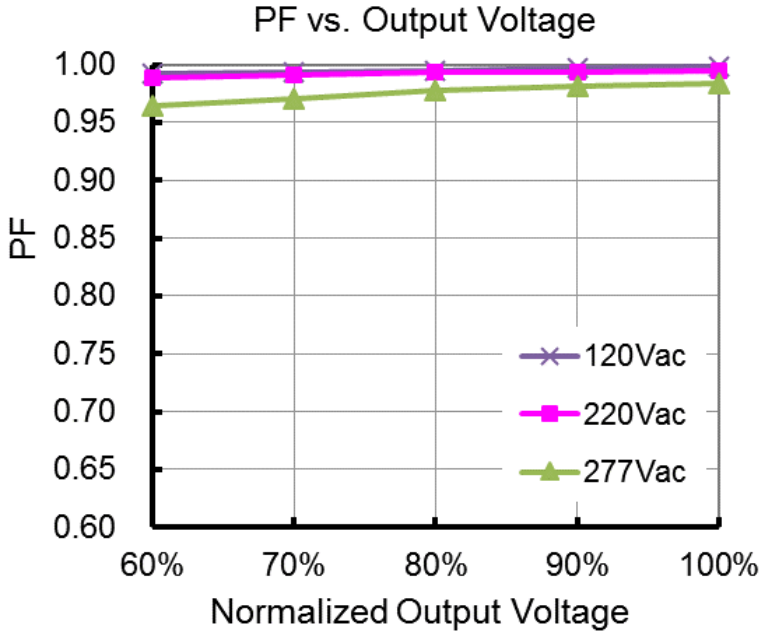


NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

■ THD vs. Load

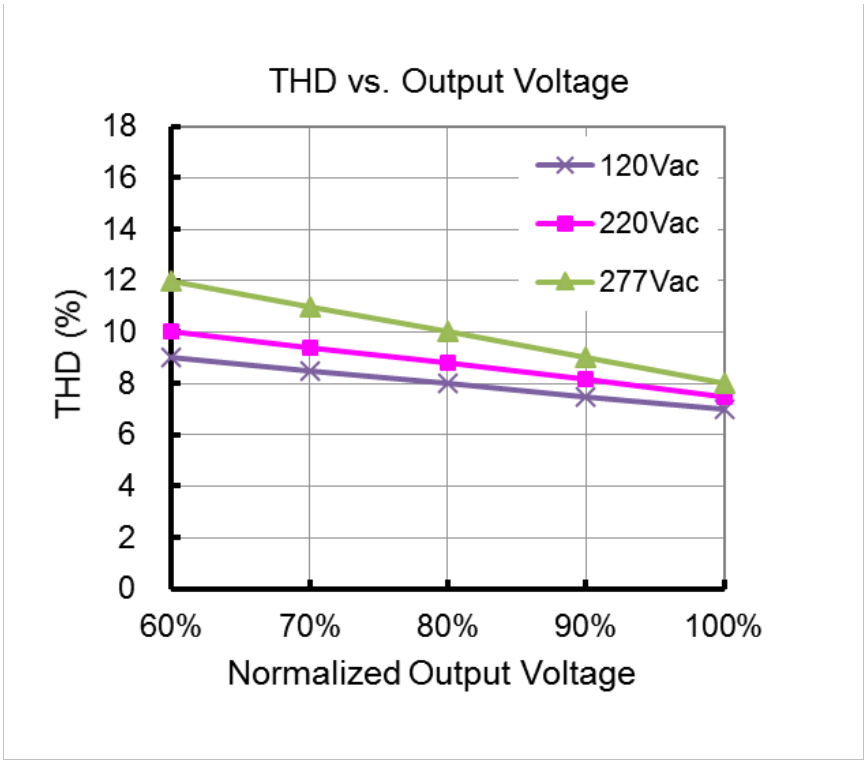


■ Efficiency vs. Load (1.4A Model)

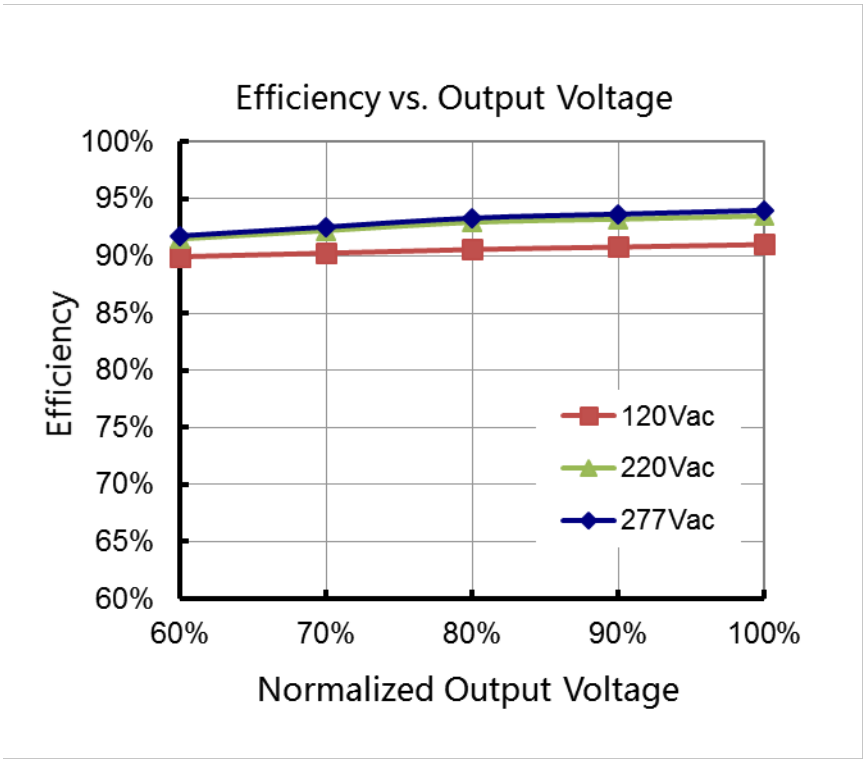


NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

■ Mechanical Design

- BLD-240-Cxxx-NN/TRU (UL Cable)

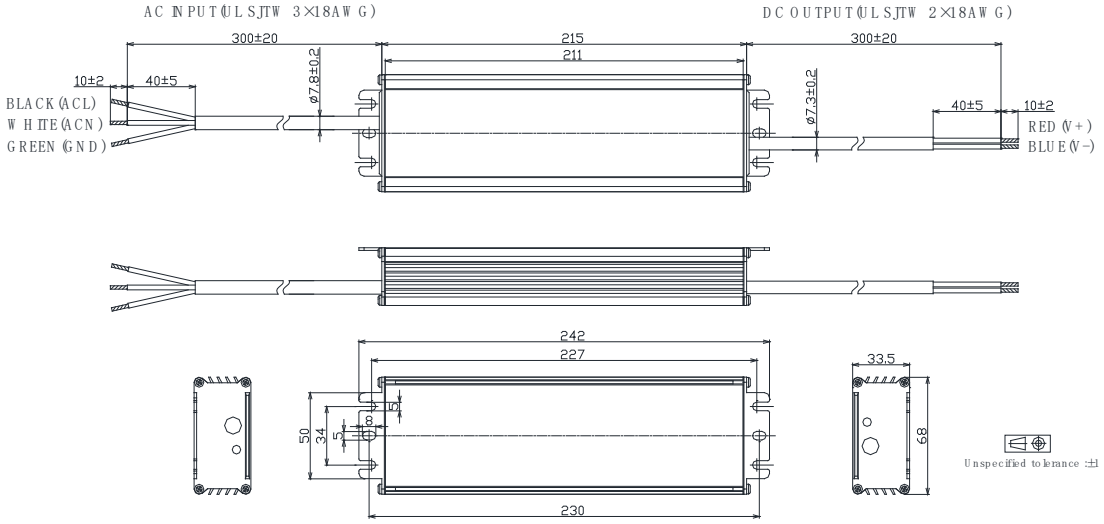


- BLD-240-Cxxx-DN/DRU (UL Cable)

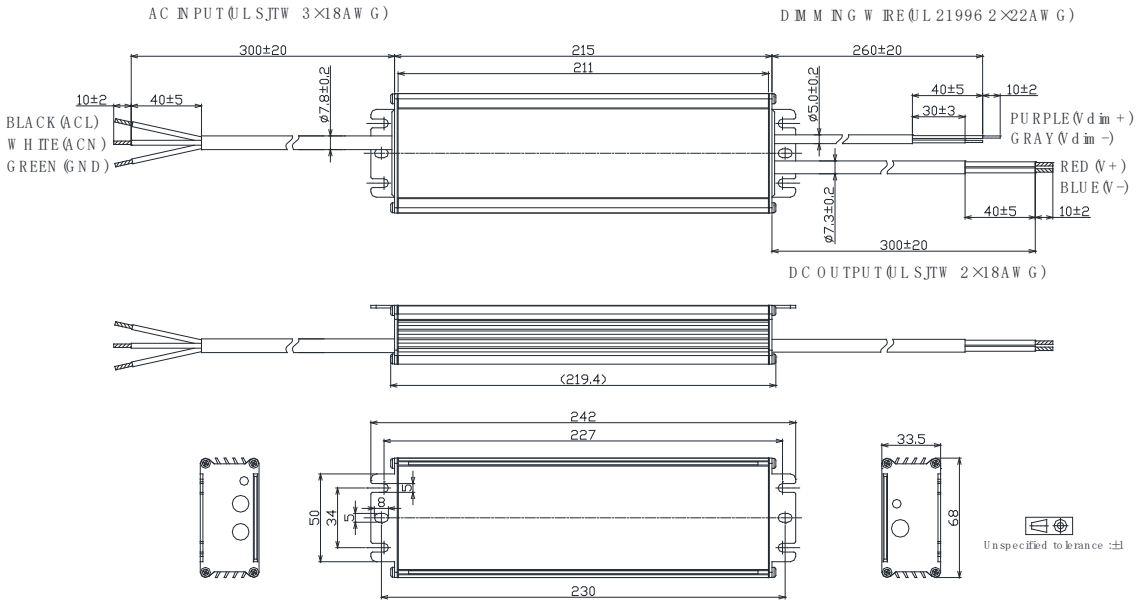


NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

- **BLD-240-Cxxx-EN/ERU (UL Cable)**

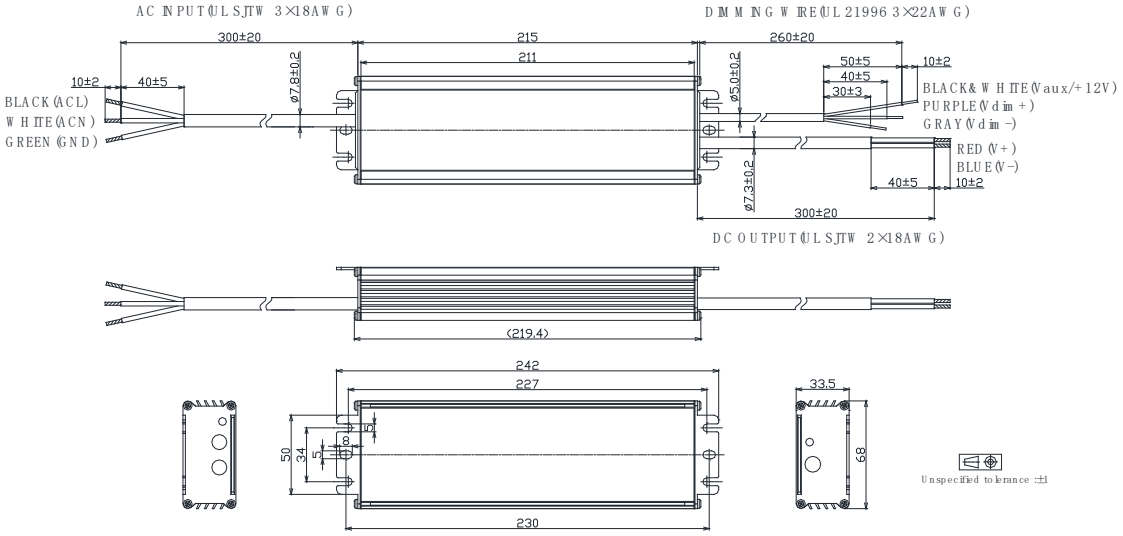


- **BLD-240-Cxxx-ARU (UL Cable)**

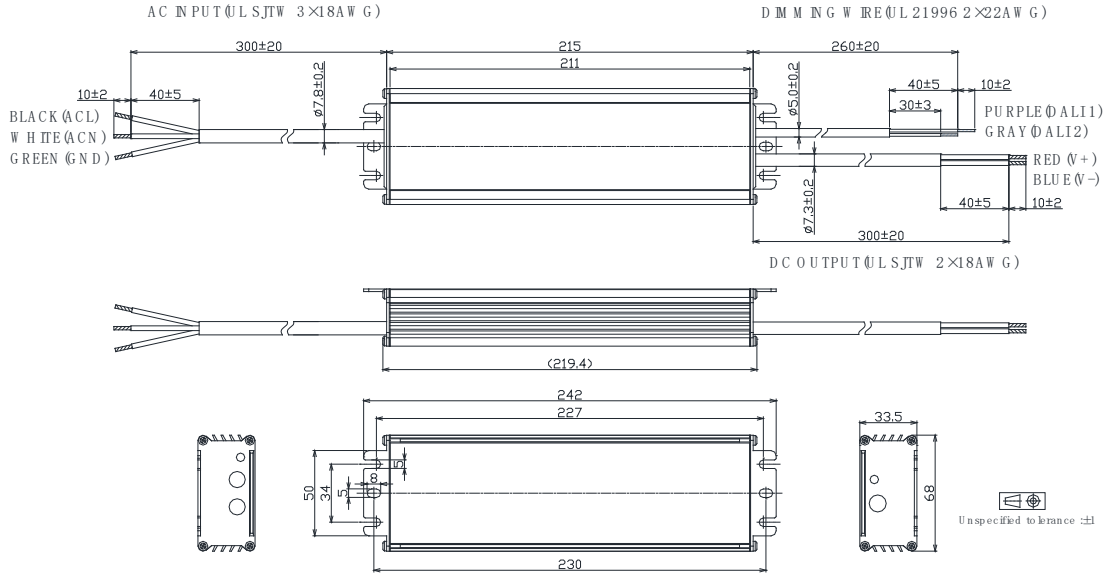


NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

- **BLD-240-Cxxx-MRU (UL Cable)**

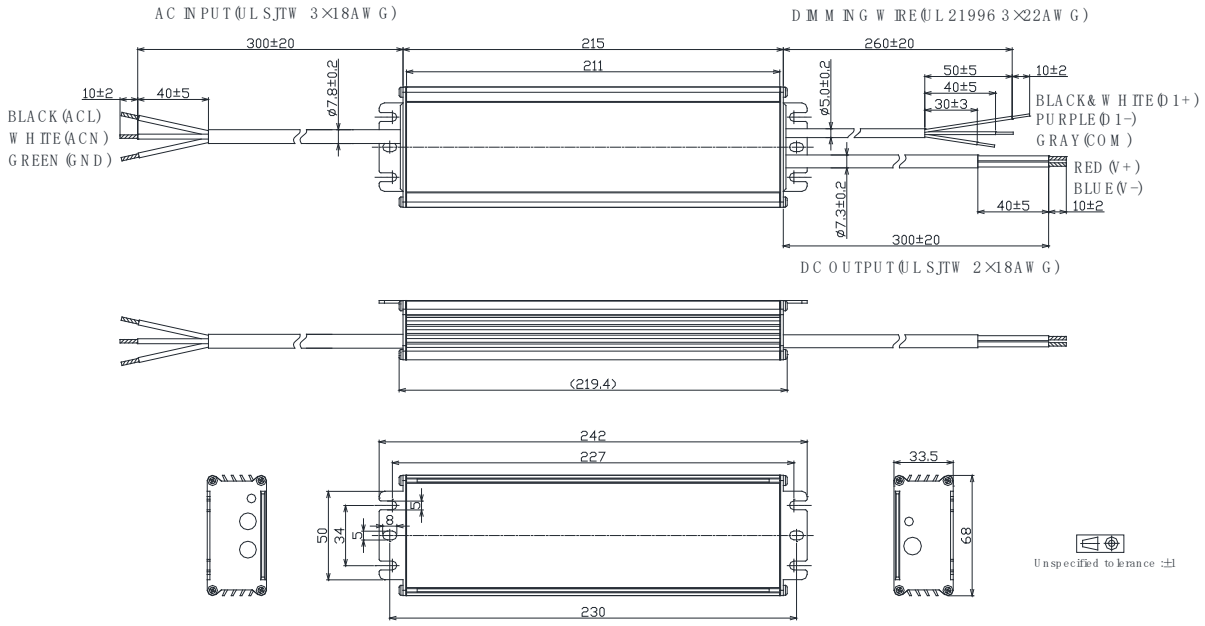


- **BLD-240-Cxxx-NN/TRS (VDE Cable)**

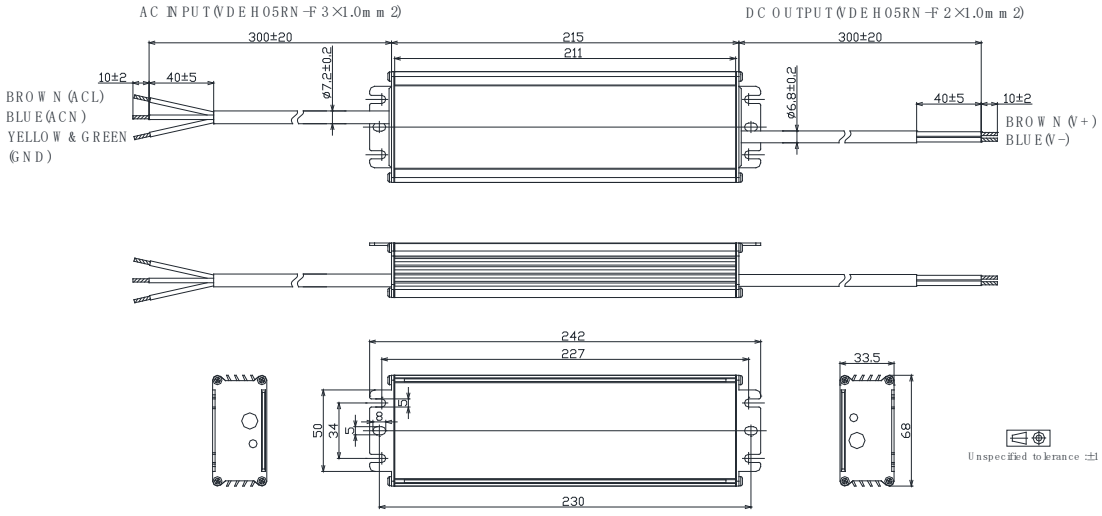


NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

- **BLD-240-Cxxx-DN/DRS (VDE Cable)**

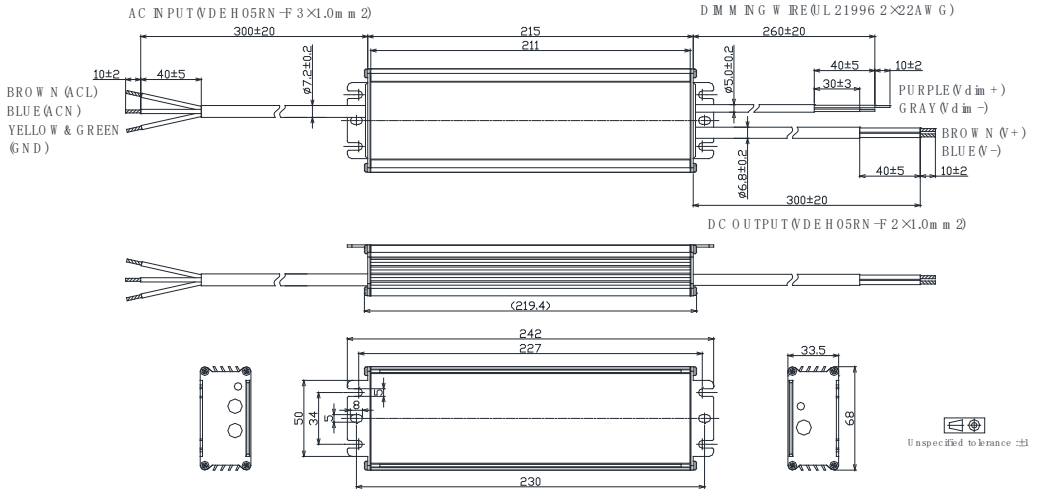


- **BLD-240-Cxxx-EN/ERS (VDE Cable)**

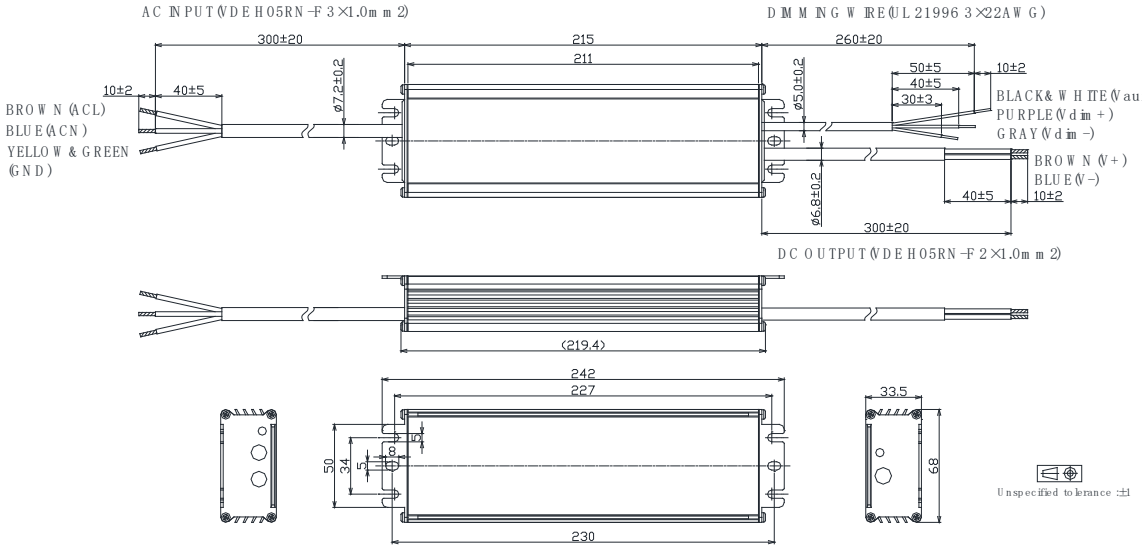


NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

- **BLD-240-Cxxx-ARS (VDE Cable)**

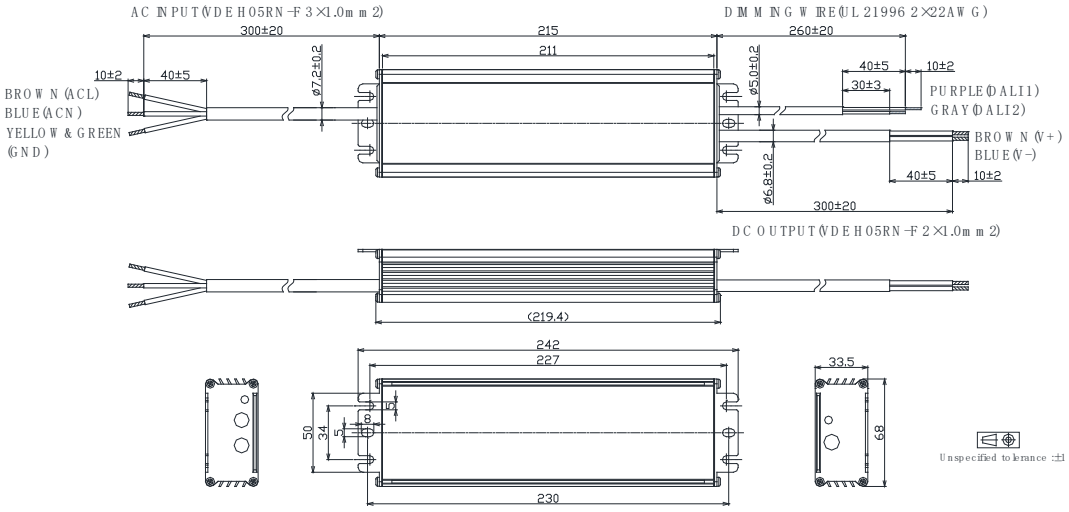

- **BLD-240-Cxxx-MRS (VDE Cable)**

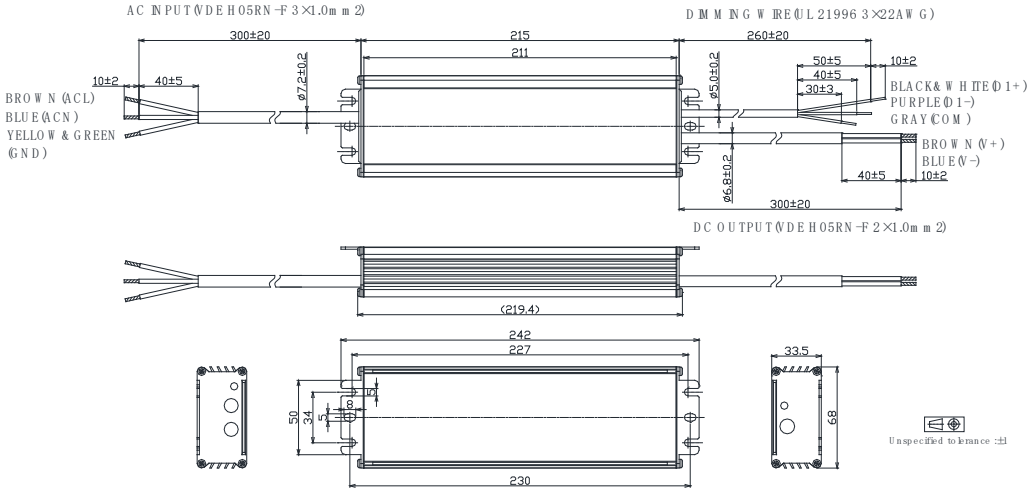

NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

■ Appendix – Operation Range

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C105	1050	250	143	238	105
	1000	250	150	250	100
	950	250	158	263	95
	900	250	167	278	90
	850	250	176	294	85
	800	250	188	313	80
	750	250	200	333	75
	700	250	214	357	70
	650	232	214	357	70
	600	214	214	357	70
	550	196	214	357	70
	500	179	214	357	70
	...	...	...	...	...
	70	25	214	357	70

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C140	1400	250	107	179	140
	1300	250	115	192	130
	1200	250	125	208	120
	1100	250	136	227	110
	1050	250	143	238	105
	1000	238	143	238	105
	950	226	143	238	105
	900	214	143	238	105
	850	202	143	238	105
	800	190	143	238	105
	750	179	143	238	105
	700	167	143	238	105
	...	...	...	...	...
	105	25	143	238	105

NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

BLD-240-C-A00000 Series

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C210	2100	250	71	119	210
	2000	250	75	125	200
	1900	250	79	132	190
	1800	250	83	139	180
	1700	250	88	147	170
	1600	250	94	156	160
	1500	250	100	167	150
	1400	250	107	179	140
	1300	232	107	179	140
	1200	214	107	179	140
	1100	196	107	179	140
	1000	179	107	179	140
	...	...	...	...	...
	140	25	107	179	140

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C280	2800	250	54	89	280
	2700	250	56	93	270
	2600	250	58	96	260
	2500	250	60	100	250
	2400	250	63	104	240
	2300	250	65	109	230
	2200	250	68	114	220
	2100	250	71	119	210
	2000	238	71	119	210
	1900	226	71	119	210
	1800	214	71	119	210
	1700	202	71	119	210
	...	...	...	...	...
	210	25	71	119	210

NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C420	4200	250	36	60	420
	4000	250	38	63	400
	3900	250	38	64	390
	3800	250	39	66	380
	3700	250	41	68	370
	3600	250	42	69	360
	3500	250	43	71	350
	3400	250	44	74	340
	3300	250	45	76	330
	3200	250	47	78	320
	3100	250	48	81	310
	3000	250	50	83	300
	2900	250	52	86	290
	2800	250	54	89	280
	2700	241	54	89	280
	...	...	...	...	...
	280	25	54	89	280

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C690	6900	250	22	36	690
	6800	250	22	37	680
	6600	250	23	38	660
	6400	250	23	39	640
	6200	250	24	40	620
	6000	250	25	42	600
	5800	250	26	43	580
	5600	250	27	45	560
	5400	250	28	46	540
	5200	250	29	48	520
	5000	250	30	50	500
	4800	250	31	52	480
	4600	250	31	52	480
	4400	250	31	52	480
	...	...	...	...	...
	480	25	31	52	480

NEUMÜLLER Elektronik GmbH
Gewerbegebiet Ost 7 - 91085 Weisendorf - Germany - Phone: + 49 9135 73666 0 - Fax:+ 49 9135 73666 - 60 - www.neumueller.com - info@neumueller.com