

# Halogen non-reflector

## 7158XHP 150W G6.35 24V 1CT/10X10F

Halogen non-reflector lamps offer high-quality light and are easy to install, replace and operate. All halogen non-reflector lamps incorporate a distortion-free quartz bulb and a precise positioning of the mounted filament. These ensure optimal beam performance and consistent, high light output. A wide range of wattages is available for a broad variety of applications, including projection systems. In addition you get all the proven advantages of halogen technology such as a full spectrum and a color rendering index (CRI) of 100 – the same as natural light and the best that it can be. Halogen lamps also create a comfortable warm white light, and they maintain their lumen output, with almost no reduction, throughout their lifetime.

## Product data

### • General Information

| | |
|---|---|
| Cap-Base | G6.35 [ G6.35] |
| Philips Code | 7158XHP |
| ANSI Code | FCS |
| LIF Code | A1/216 |
| Operating Position | S90 [ Standing +/-90D or Base Down (BDH)] |
| Main Application | Projection |
| Life To 50% Failures (Nom) | 40 h |

### • Light Technical

| | |
|---|---|
| Luminous Flux (Rated) (Nom) | 6000 lm |
| Correlated Color Temperature (Nom) | 3400 K |
| Color Rendering Index (Nom) | 100 |

### • Operating and Electrical

| | |
|---|---|
| Power (Rated) (Nom) | 150 W |
| Voltage (Nom) | 24 V |

### • Mechanical and Housing

| | |
|---|---|
| Bulb Material | Quartz-UV Open |
| Filament Shape | Flat |
| Filament Dimensions WxH | 7.4x3.5 |

### • Luminaire Design Requirements

| | |
|---|---|
| Bulb Temperature (Max) | 900 °C |
| Pinch Temperature (Max) | 400 °C |


### • Product Data

| | |
|---|---|
| Full product code | 871150041020750 |
| Order product name | 7158XHP 150W G6.35 24V 1CT/ 10X10F |
| EAN/UPC - Product | 8711500410207 |
| Order code | 924031720503 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 100 |
| Material Nr. (12NC) | 924031720503 |
| Net Weight (Piece) | 0.004 kg |

PHILIPS

# Halogen non-reflector


## Dimensional drawing

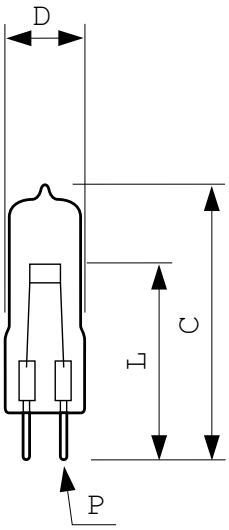



G6.35, GY6.35

### 7158XHP 150W G6.35 24V

| Product | D | L | L | L | P | P | P |
|---|---|---|---|---|---|---|---|
| 7158XHP 150W G6.35 24V 1CT/10X10F | 13.5 mm | 32.75 mm | 33.25 mm | 33 mm | 1.05 mm | 1 mm | 0.95 mm |




© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

**www.philips.com/lighting**

2015, December 24
data subject to change