
Hal Single End 64260 30 W 12 V

Low-voltage halogen lamps without reflector

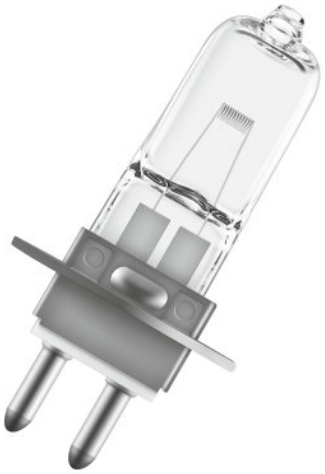

Areas of application

- Lamps for special luminaires
- Medical fiber optics (HLX)

Product benefits

- Compared to standard lamps up to 10 % higher luminous efficacy (HLX)
- Instant light (HLX)

Product features

- Xenon instead of krypton as the filler gas (XENOPHOT HLX versions)
- Luminous flux up to 10 % higher with same power consumption (XENOPHOT HLX versions)
- HLX tungsten halogen low-voltage lamp with or without reflector
- Dimmable (HLX)





© 2018, OSRAM GmbH. All rights reserved.

Technical data


Electrical data

Nominal voltage	12.0 V
Nominal wattage	30.00 W

Photometrical data

Color temperature	3300 K
Nominal luminous flux	800 lm

Dimensions & weight

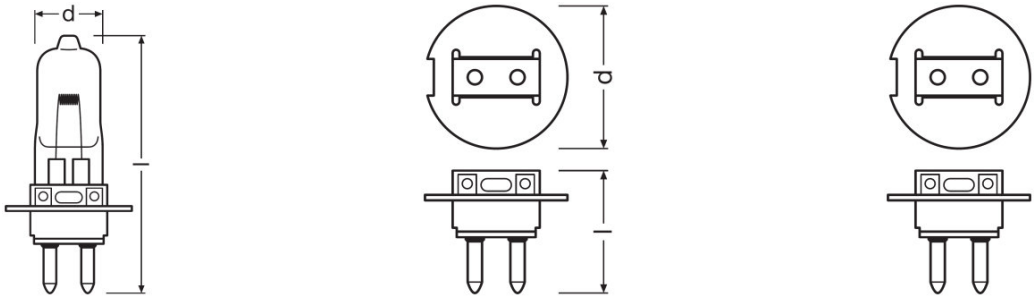

Diameter	9 mm
Length	40.0 mm
Light center length (LCL)	14.0 mm
Filament length	2.60 mm
Illuminated field	2.6*1.3 mm²
Filament diameter	1.3 mm

Lifespan

Lifespan	50 h

Additional product data

Base (standard designation)	PG22

Capabilities

Burning position	Any

Certificates & standards

EEI – Energy Label	B

© 2018, OSRAM GmbH. All rights reserved.

Country specific categorizations


LIF	M/185
Order reference	64260 30W 12V P

Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4050300099798	OSRH64260	-	-	-

© 2018, OSRAM GmbH. All rights reserved.





Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300099798	Hal Single End 64260 30 W 12 V	Folding carton box 1	70 mm x 19 mm x 25 mm	0.03 dm^3	8.50 g
4050300338309	Hal Single End 64260 30 W 12 V	Shipping carton box 30	158 mm x 81 mm x 131 mm	1.68 dm^3	321.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2018, OSRAM GmbH. All rights reserved.