PRODUCT DATASHEET
ENDURA STYLE Wall Wide Sensor 12W DG

ENDURA STYLE WALL WIDE | Bright LED luminaires with hidden sensor



AREAS OF APPLICATION

- Outdoor use (only roofed areas)
- Building facades
- Entrance lighting
- Patios, balconies

PRODUCT BENEFITS

- 5 years guarantee
- Easy and quick installation
- Energy-efficient thanks to LED technology

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Integrated light and motion sensor
- Type of protection: IP44
- Die-cast aluminum housing
- Available in two housing colors



© 2018, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

Electrical data

Nominal wattage	12.00 W
Operating mode	Electronic control gear (ECG)
Nominal voltage	220...240 V
Mains frequency	50/60 Hz


Photometrical data

Color temperature	3000 K
Color rendering index Ra	≥80
Light color (designation)	Warm White
Luminous flux	750 lm
Luminous efficacy	65 lm/W

Luminaire sensor data

Sensor technology	Passive infrared (PIR)
Sensor detection angle	120 °
Detection range of motion sensor	8 / 7 / 4 / 1 m
Detection threshold of daylight sensor	2 / 10 / 50 lx
Sensor controlled switching time	5 / 90 / 5 / 15 s

Dimensions & weight

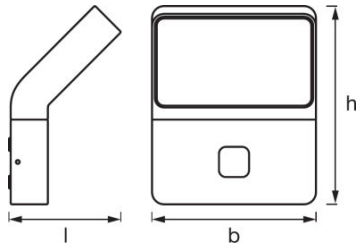

Length	118.0 mm
Width	176.0 mm
Height	212.0 mm
Product weight	1300.00 g

Colors & materials

Body material	Aluminum

© 2018, LEDVANCE GmbH. All rights reserved.

Housing color	Dark gray
Product color	Dark gray
Cover material	Polycarbonate (PC)

Temperatures & operating conditions

Ambient temperature range	-20…40 °C

Lifespan

Lifespan	30000 h

Additional product data

Mounting type	Surface
Product remark	Available from July 2018

Capabilities

Dimmable	No
Type of connection	Terminal

Certificates & standards

Protection class	I
Type of protection	IP44
Standards	CE/EAC/REACH/RoHS

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075123335	ENDURA STYLE Wall Wide Sensor 12W DG	Shipping carton box 4	549 mm x 214 mm x 250 mm	29.37 dm^3	6539.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

- www.osram-lamps.com/guarantee

DISCLAIMER

© 2018, LEDVANCE GmbH. All rights reserved.

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2018, LEDVANCE GmbH. All rights reserved.