Superia CMI-T/ CMI-TC / CMI-TD

SUPERIA CMI-TC 70W NDL/UVS G8.5 SLV

0020292



Cechy gamy


- Unique one-piece elliptical arc tube
- Ceramic arc tube ensures colour uniformity and stability throughout lamp life
- Very high luminous efficiency in a compact lamp format
- Excellent colour rendering
- UV-stop quartz reduces colour fading of merchandise
- For use only in luminaires equipped with a protective cover glass
- Applications in both interior and exterior lighting shops, hotel lobbies and architectural
- WDL types can be operated on electronic and electromagnetic gear. NDL types have reduced life when operated on electromagnetic gear

PRZEGLĄD PRODUKTÓW

Numer zamówienia	0020292
Technologia	HID
Kolor światła	940 Cool White
Klasa energetyczna	A+
Średnia żywotność (godz.)	15000
Kształt lampy	Tubular
Wykończenie lampy	Clear
Ściemniacz	No
Nasadka/trzonek	G8.5
Typ	CMI-TC
Kod EAN	5410288202921
CRI (Ra)	96
Temperatura barwowa (K)	4200
Luminous flux (Rated) (lm) - EL	7300
Efficacy (Rated) (lm/w) - EL	104
Watt (Nominal) (W) - EL	70
Napięcie (V)	85


FOTOMETRIA

LAMP SPECTRUM

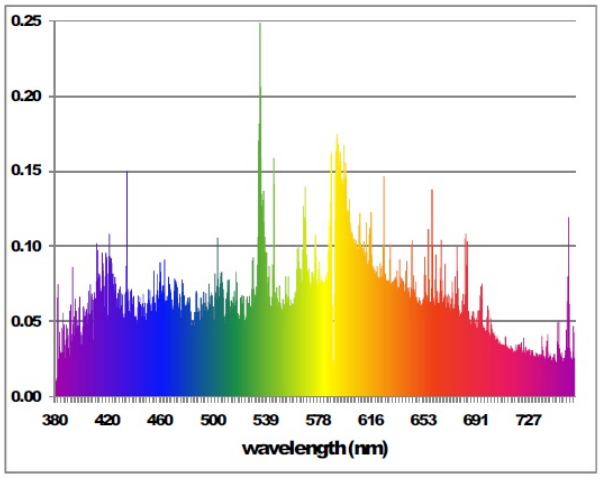

RYSUNEK TECHNICZNY

SURVIVAL RATE

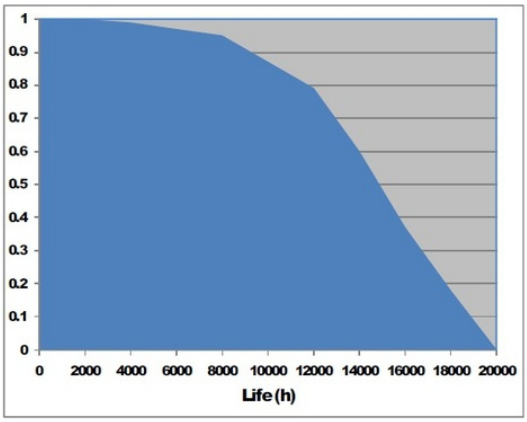

2000h	4000h	6000h	8000h	12000h	16000h
1.00	0.99	0.97	0.95	0.79	0.37