

Softone Globe

Softone Globe 23W CDL E27 G120 1CH/4

Decorative covered energy-saving lamps for consumer applications

Product data

• General Information

Cap-Base	E27 [E27]
Nominal Lifetime (Nom)	10000 h
Switching Cycle	30000X

• Light Technical

Colour Code	865 [CCT of 6500K]
Luminous Flux (Nom)	1310 lm
Luminous Flux (Rated) (Nom)	1310 lm
Colour Designation	Cool Daylight
Lumen Maintenance 2000 h (Nom)	83 %
Chromaticity Coordinate X (Nom)	313
Chromaticity Coordinate Y (Nom)	337
Colour Temperature, horizontal (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	57 lm/W
Colour Rendering Index horiz (Min)	80
Colour Rendering Index horiz (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	65 %

• Operating and Electrical

Input Frequency	50 or 60 Hz
Power (Rated) (Nom)	23.0 W
Lamp Current (Nom)	165 mA
Wattage Equivalent	95 W
Starting Time (Nom)	0.3 s
Warm Up Time To 60% Light (Min)	10 s
Warm Up Time To 60% Light (Max)	100 s
Power Factor (Nom)	0.6
Voltage (Nom)	220-240 V

• Controls and Dimming

Dimmable	No

• Approval and Application

Energy Efficiency Label	A
Mercury (Hg) Content (Max)	2.0 mg
Mercury (Hg) Content (Nom)	1.5 mg
Energy Consumption kWh/1000 h	23 kWh

• Product Data

Full product code	871150046906901
Order product name	Softone Globe 23W CDL E27 G120 1CH/4
EAN/UPC - Product	8711500469069
Order code	46906901
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929689152001

PHILIPS


Softone Globe

Net Weight (Piece) 0.145 kg

Warnings and Safety

- Breaking a lamp is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a closed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Compact fluorescent lamps have to be treated as special waste, they must be taken to your local waste facilities for recycling. The European Lighting Industry has set up an infrastructure, capable of recycling mercury, other metals, glass etc.

Dimensional drawing

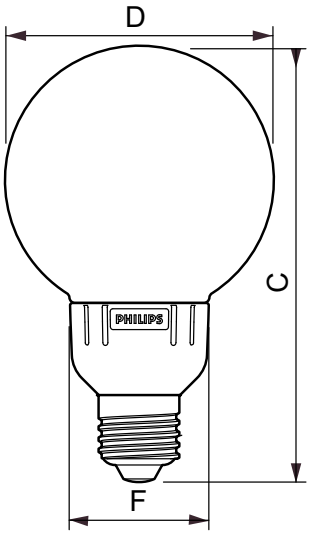

E27 G93, G120



Amb GL 23W CDL E27 220-240V 50/60Hz G120

Product	C	F
Softone Globe 23W CDL E27 G120 1CH/4	182 mm	48.2 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change