

MASTER PL-Electronic

MASTER PLE-R 33W/865 E27 220-240V 1CT/6

Non-covered energy-saving MASTER lamps - the perfect choice for end users who demand the best performance and reliability. With a wide product range with different wattages, it offers comprehensive choices to suit different usages and applications

PHILIPS

MASTER PL-Electronic

Product data

- General Information

Cap-Base	E27
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X

- Light Technical

Color Code	865 [CCT of 6500K]
Luminous Flux (Nom)	2160 lm
Luminous Flux (Rated) (Nom)	2160 lm
Color Designation	Cool Daylight
Lumen Maintenance 2000 h (Nom)	90 %
Chromaticity Coordinate X (Nom)	313
Chromaticity Coordinate Y (Nom)	337
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	65.2 lm/W
Color Rendering Index (Nom)	81
LLMF At End Of Nominal Lifetime (Nom)	65 %

- Operating and Electrical

Input Frequency	50 or 60 Hz
Power (Rated) (Nom)	33.0 W
Lamp Current (Nom)	155 mA
Wattage Equivalent	145 W
Starting Time (Nom)	1.0 s
Warm Up Time To 60% Light (Min)	10 s
Warm Up Time To 60% Light (Max)	60 s
Power Factor (Nom)	0.9
Voltage (Nom)	220-240 V

- Controls and Dimming

Dimmable	No

- Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Max)	1.5 mg
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	33 kWh


- Product Data

Full product code	872790021035410
Order product name	MASTER PLE-R 33W/865 E27 220-240V 1CT/6
EAN/UPC - Product	8727900210354
Order code	929689132601
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929689132601
Net Weight (Piece)	125.000 g

Warnings and Safety

- Breaking a lamp is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a closed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Compact fluorescent lamps have to be treated as special waste, they must be taken to your local waste facilities for recycling. The European Lighting Industry has set up an infrastructure, capable of recycling mercury, other metals, glass etc.

Dimensional drawing

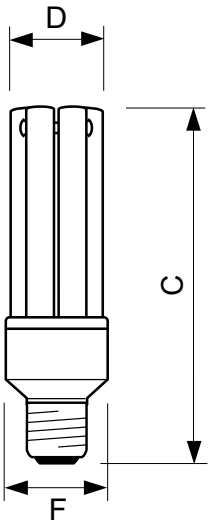

E27



MasPLE Erp 33W CDL E27 220-240V 50/60Hz

Product
MASTER PLE-R 33W/865 E27 220-240V 1CT/6

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting