

TL-M Rapid Start Standard Colours

TL-M RS 65W/33-640 1SL/25

Low-pressure mercury discharge lamps with a tubular 38 mm envelope

Product data

• General Information

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 50% Failures (Nom)	13000 h
System Description	Rapid Start (RS)

• Light Technical

Colour Code	33-640
Luminous Flux (Nom)	4750 lm
Colour Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	73 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	81 %
Chromaticity Coordinate X (Nom)	377
Chromaticity Coordinate Y (Nom)	381
Colour Temperature, horizontal (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	74 lm/W
Colour Rendering Index horiz (Nom)	63

• Operating and Electrical

Power (Rated) (Nom)	64.0 W
Lamp Current (Nom)	0.670 A
Voltage (Nom)	110 V

• Controls and Dimming

Dimmable	Yes

• Approval and Application

Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	8.0 mg
Energy Consumption kWh/1000 h	74 kWh

• Product Data

Full product code	871150072486140
Order product name	TL-M RS 65W/33-640 1SL/25
EAN/UPC - Product	8711500724861
Order code	72486140
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928031003371
Net Weight (Piece)	344.200 g
ILCOS Code	FD-65/41/2B-LC/P-G13


PHILIPS

TL-M Rapid Start Standard Colours

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

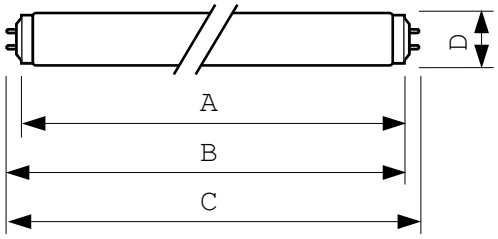


TL-M 65W/33-640 RS


Product	D	A	B	B	C
TL-M RS 65W/33-640 1SL/25	40.5 mm	1500 mm	1507.1 mm	1504.7 mm	1514.2 mm

G13, T12



Photometric data

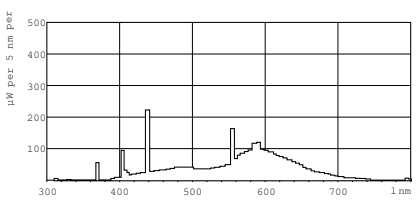

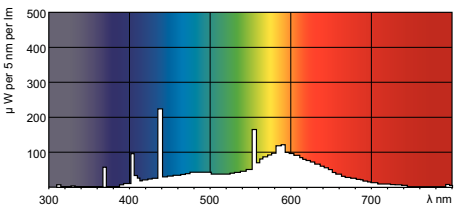

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, March 15
data subject to change