

Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL TL MINI 15W/10 /10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Product data

- General Information

Cap-Base	G5 [G5]
Useful Life (Max)	1000 h

- Light Technical

Color Code	10
Color Designation	Actinic
LLMF 2000 h Rated	45 %

- Operating and Electrical

Power (Rated) (Nom)	15 W
Lamp Current (Nom)	0.40 A
Voltage (Nom)	43 V

- UV

UV-B/UV-A (IEC)	0.2 %

- Product Data

Full product code	871150095148927
Order product name	Actinic BL TL TL MINI 15W/10 / 10X25CC
EAN/UPC - Product	8711500951489
Order code	928001201030
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	250
Material Nr. (12NC)	928001201030
Net Weight (Piece)	25.300 g

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


PHILIPS

Actinic BL TL(-K)/TL-D(-K)


Dimensional drawing

TL 15W/10


Product	D	A	B	B	C
Actinic BL TL TL MINI 15W/10 /10X25CC	16 mm	288.3 mm	295.4 mm	293.0 mm	302.5 mm

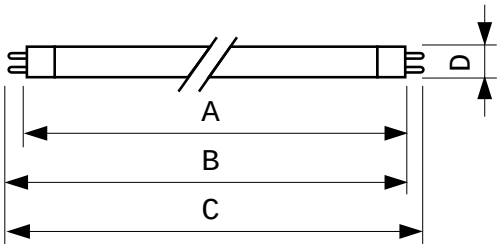


TL G5



Photometric data

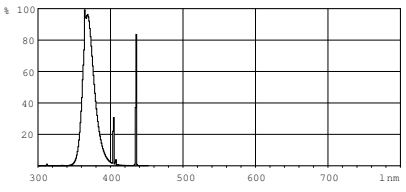

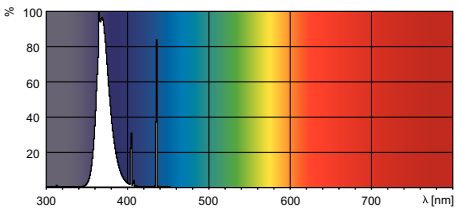

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 24
data subject to change