

TL-D Colored

TL-D Colored 36W Red 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

Product data

• General Information

Cap-Base	G13 [G13 Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	12000 h
Life To 50% Failures (Nom)	15000 h

• Light Technical

Color Code	150
Luminous Flux (Nom)	55 lm
Luminous Flux (Rated) (Nom)	55 lm
Color Designation	Red (HO)
Chromaticity Coordinate X (Nom)	718
Chromaticity Coordinate Y (Nom)	282
LLMF 2000 h Rated	85 %

• Operating and Electrical

Power (Rated) (Nom)	36.0 W
Lamp Current (Nom)	0.440 A

• Temperature

Design Temperature (Nom)	25 °C

• Controls and Dimming

Dimmable	Yes

• Approval and Application

Energy Efficiency Label (EEL)	E
Mercury (Hg) Content (Nom)	13.0 mg
Energy Consumption kWh/1000 h	51 kWh

• Product Data

Full product code	871150072748040
Order product name	TL-D Colored 36W Red 1SL/25
EAN/UPC - Product	8711500727480
Order code	928048501505
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928048501505
Net Weight (Piece)	138.400 g


PHILIPS

TL-D Colored


Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

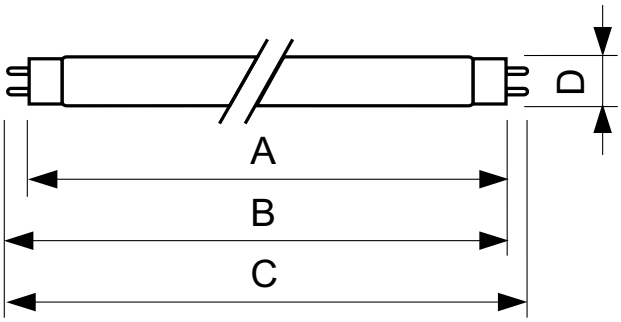


T8 G13




TL-D 36W/150 Red

Product	D	A	B	B	C
TL-D Colored 36W Red 1SL/25	28.0 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

Photometric data

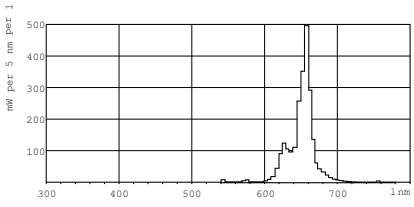

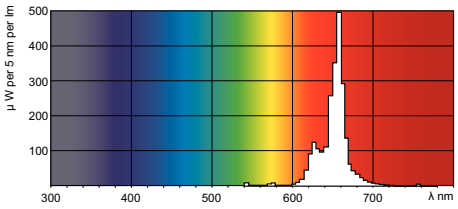

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, April 18
data subject to change