

# Flexo Print

## TL 60W/10-R SLV/25

Flexo print TL lamps emit almost all of their light (99.9%) in the useful UVA and visible blue wavebands – between 350 and 400 nm – and have peak intensity at 370 nm (except for the /03 version). This makes them ideal for flexo printing equipment and photopolymerization processes. In addition, the 'R' lamps in the family have an internal 200-degree reflector to further optimize the lamp's overall efficiency.

## Product data

### • General Information

| | |
|---|---|
| Cap-Base | G13 [ G13 Medium Bi-Pin Fluorescent] |
| Main Application | Reprography (R) |
| Useful Life (Nom) | 1000 h |

### • Light Technical

| | |
|---|---|
| Color Code | 10-R |
| Color Designation | Ultra Violet A |
| Chromaticity Coordinate X (Nom) | 222 |
| Chromaticity Coordinate Y (Nom) | 210 |
| Lumen Depreciation At 500 Hours | 10 % |
| Lumen Depreciation At 1000 Hours | 15 % |
| LLMF 2000 h Rated | 30 % |

### • Operating and Electrical

| | |
|---|---|
| Power (Rated) (Nom) | 62 W |
| Lamp Current (Nom) | 0.7 A |
| Voltage (Nom) | 102 V |

### • Approval and Application

| | |
|---|---|
| Mercury (Hg) Content (Nom) | 13.0 mg |

### • UV

| | |
|---|---|
| UV-B/UV-A (IEC) | 0.1 % |
| UV-A Radiation 100Hr (IEC) | 15.8 W |

### • Product Data

| | |
|---|---|
| Full product code | 871150061572540 |
| Order product name | TL 60W/10-R SLV/25 |
| EAN/UPC - Product | 8711500615725 |
| Order code | 928008401003 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 25 |
| Material Nr. (12NC) | 928008401003 |
| Net Weight (Piece) | 260.200 g |


## Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

PHILIPS

# Flexo Print


## Dimensional drawing

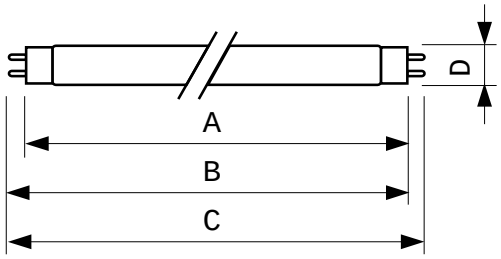



**TL 60W/10-R**


| Product | D | A | B | B | C |
|---|---|---|---|---|---|
| TL 60W/10-R SLV/25 | 40.5 mm | 1199.4 mm | 1206.5 mm | 1204.1 mm | 1213.6 mm |

TL G13




## Photometric data

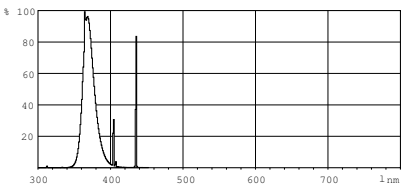

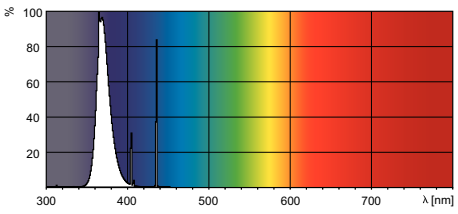
© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

**www.philips.com/lighting**

2016, January 12
data subject to change