

Architectural MSD

MSD 575 1CT/16

The high luminous efficacy and optimal lamp filling of the single ended Architectural MSD lamps create high beam intensity and excellent color rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.

Product data

• General Information

Cap-Base	GX9.5 [GX9.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Studio/Disco
Life To 50% Failures (Nom)	3000 h
System Description	-

• Light Technical

Color Code	- [Not Specified]
Luminous Flux (Min)	36000 lm
Luminous Flux (Nom)	43000 lm
Chromaticity Coordinate X (Nom)	323
Chromaticity Coordinate Y (Nom)	328
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (rated) (Nom)	75 lm/W
Color Rendering Index (Nom)	75

• Operating and Electrical

Power (Rated) (Nom)	575 W
Lamp Current (Nom)	6.95 A
Ignition Supply Voltage (Min)	207 V

• Controls and Dimming

Dimmable	No

• Mechanical and Housing

Cap-Base Information	-

• Luminaire Design Requirements

Bulb Temperature (Max)	600 °C
Pinch Temperature (Max)	350 °C

• Product Data


Full product code	872790091755000
Order product name	MSD 575 1CT/16
EAN/UPC - Product	8727900917550
Order code	928098805114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	16
Material Nr. (12NC)	928098805114
Net Weight (Piece)	0.062 kg

PHILIPS

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

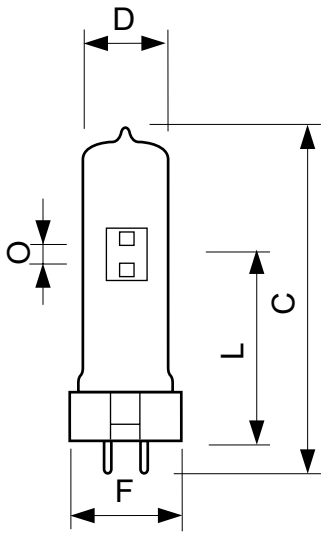


GX9.5


MSD 575

Product	D	O	L	L	L	C	F	F	F
MSD 575 1CT/16	30 mm	8.0 mm	64 mm	66 mm	65 mm	125 mm	36 mm	35 mm	34 mm



Photometric data

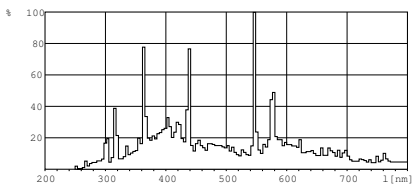

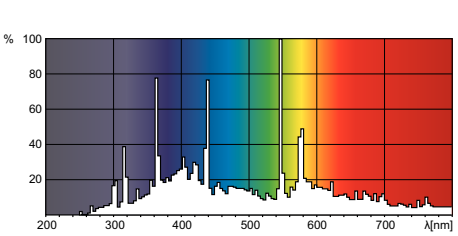

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 24
data subject to change